

**SPFRAMEG**  
Design by Manuel Vivian


Collection consisting of ceiling or wall lamps and suspended lamps in white aluminium, and floor lamps. Available in several sizes. The ceiling/wall lamps are also supplied in three different heights.

Typology: SUSPENSION

Ratings

- Built in **LED** module
- CCT 3000 K
- Uplight
- Surface installation over holes
- Supply voltage ~220-240V
- Switch mode: on-off
- Dimmable DALI LED driver
- Extruded aluminium profile, painted
- Linear prismatic diffuser

Product code composition

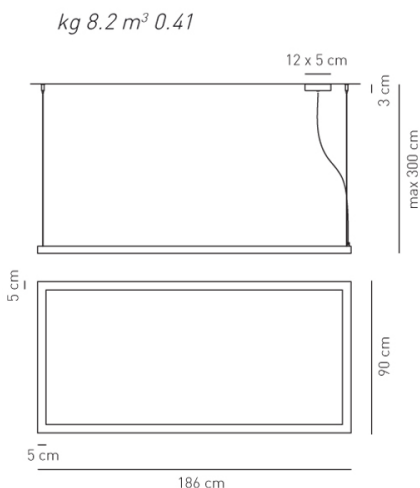


**FRAMEWORK**

Type	Article	Colours	Code End	Source
SP	FRAME G LED	BC white	XX	LED 98,4W - diffused beam 3000K

~13236 lm 131 lm/W

example composition code | **SP** | **FRAMEGLED** | **BC** | **XX** |

Available colors



**BC**  
Wrinkled  
white  
aluminium

SPFRAMEGLED\_\_BCXX      CUSTOMER \_\_\_\_\_      NOTES \_\_\_\_\_

NOTICE:

Luminous flux (lm) and efficacy (lm/W) for all LED luminaires is estimated based on nominal ratings of the LED sources. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.