




Table Lamps | 220-240 V  
2 topLED 20 W DC - 24 W AC | CRI 90  
**9585**

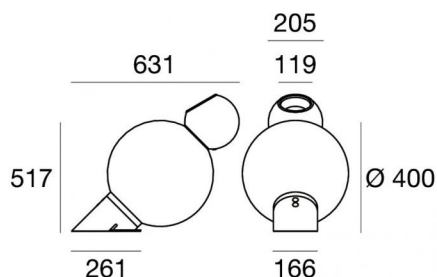

Technical data	
Construction year	2021
Type	Table Lamps
Installation position	Floor
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Light emission direction	downward and upward
Power	20 W
Source lumens	2290 lm
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP20
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	DALI-2 - PUSH DIM
Directional	Swivelling
total angle (vertical plane)	360 °
total angle (horizontal plane)	360 °
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	2.5 m
Electric socket	Type F
Resin potting	No
Type of light emission	Double emission
Net weight	20.600 Kg
Electrostatic discharge protection	No
Surge protection	No

### Finishing casing

Material	Aluminium
Colour	Anodised Black
Processing	Anodisation

### Finishing diffuser

Material	Glass
Colour	transparent

### Finishing base

Material	Iron
Colour	black
Processing	Coating



## Table Lamps | 220-240 V | 2 topLED 20 W DC - 24 W AC | CRI 90 | Base 9585

Double emission table lamps for indoor application. The warm white LED light source with a general lighting light distribution is composed of 2 topped LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 2290 lm, with a 114.5 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a anodised black finish, processed by means of anodisation; the diffuser is made of glass. The ingress protection degree is IP20; the total weight is of 20.600 kg.

The total absorbed power is 24 W. The power supply cable is included and features a 2.5 m lenght.

The device features protection class I and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

### Energy efficiency class

This product contains 2 light sources of energy efficiency class F.

### Illuminotechnical Features

Light Output Ratio (LOR)	74 %
Source lumens	2290 lm
Delivered lumens	1711 lm
Consumption	24 W
Luminaire efficacy	71 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25

### LED Life / Failure Ratio

L70 B20 C0 72500h

### OPTICAL

Light distribution simmetry	Symmetrical
C0/C180 optics	180°

