

# WIREFLOW

Design by Arik Levy.

# VIBIA

## Reference

**0315.**

## Application

Hanging lamps

## Installation type

Surface

## Description

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with twenty LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

## Diffuser

Pressed-glass diffuser

## Materials

Diffuser: Pressed Glass

Body: Aluminum

Horizontal rods: Steel


Ceiling rose: Steel

## Finish



**0315-04** Black lacquer (RAL 9005)

## Sketch



## Electrical characteristics

20 x LED 4,5W 350mA

Total 89.6 W



A+



**Led** 2700K CRI >80 9805 lm 109 lm/W

**Fixture:** 3933 lm 60 lm/W

**Driver included:** CC - Constant Current 350 mA 100-240V 50/60Hz

**Electronic dimming** DALI 1-10V PUSH

**ficha.fichatecnicaproducto.regulacion.opcional** SMART

## Technical characteristics

- Driver: 350mA / TCI / MAXI JOLLY US DALI 50 / 100/127V / 50/60Hz

## Physical characteristics

2 Box / 0.09 x 1.62 x 1.13 m. / Vol. 0.4241 m<sup>3</sup> /

Gross weight 27.2 kg. / Net weight 24.2 kg.


## Installation and assembly

Please, see the installation manual

## Light distribution

### General lighting

Lamp for general lighting that equally distributes the light in all directions.



## Photometric data

Efficiency : 40.11%

Coordinate system : CG

Total flux : 9805

Maximum value : 53.87


Light position : C=15.00 G=55.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

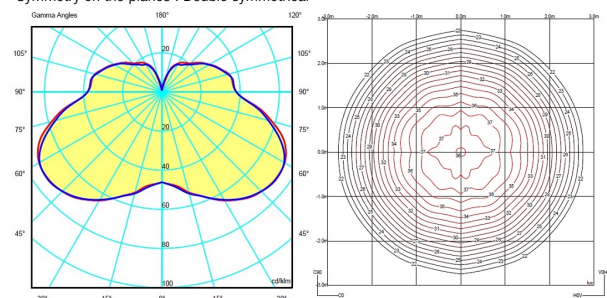

## Certificates

IP20



