

# WIREFLOW

Design by Arik Levy.

## Reference

**0355.**

## Application

Hanging lamps

## Installation type

Surface

## Description

Wireflow designed by Arik Levy. Hanging lamp. The elegant structure of fine cables and LED terminal by Wireflow allows the combination of multiple individual pieces to carry out major graphic lighting installations which generate a visual opportunity of lines and points of light and bring a markedly conceptual character to an intangible product. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements. The electrical connection point can be positioned on the ceiling or wall.

## Diffuser

Pressed-glass diffuser

## Materials

Diffuser: Glass

Body: Aluminum

Rods: Steel


Ceiling rose: Steel

## Finish



**0355-04** Black lacquer (RAL 9005)

## Sketch



## Electrical characteristics

6 x LED 4,5W 350mA

Total 26.9 W



A+

# VIBIA



LED 2700K CRI >80 2942 lm 109 lm/W

Fixture: 1180 lm 60 lm/W

Driver included: CC - Constant Current 350 mA 100-240V 50/60Hz

Electronic dimming DALI 1-10V PUSH

ficha.fichatecnicaproducto.regulacion.opcional SMART

## Physical characteristics

1 Box / 0.27 x 0.60 x 0.60 m. / Vol. 0.0972 m<sup>3</sup> /

Gross weight 6.7 kg. / Net weight 6.0 kg.


## Installation and assembly

Please, see the installation manual

## Light distribution

### General lighting

Lamp for general lighting that equally distributes the light in all directions.



## Photometric data

Efficiency : 40.11%

Coordinate system : CG

Total flux : 2941.60

Maximum value : 53.87


Light position : C=15.00 G=55.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

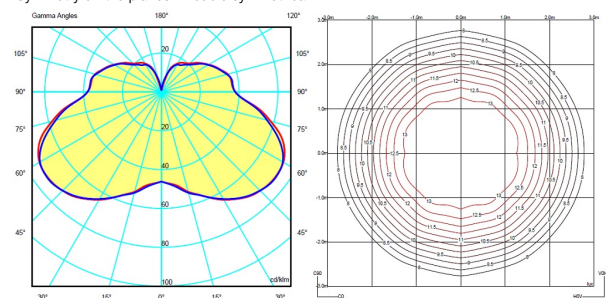

## Certificates

