

# WIREFLOW

Design by Arik Levy.

## Reference

**0376.**

## Application

Hanging lamps

## Installation type

Surface

## Description

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with 42 4.5W LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

## Diffuser

Pressed-glass diffuser

## Materials

Diffuser: Pressed Glass

Body: Aluminum

Horizontal rods: Steel


Ceiling rose: Steel

## Finish



**0376-04** Matt black lacquer (RAL 9005)

## Sketch



## Electrical characteristics

42 x LED 4,5W 350mA

Total 188.2 W



# VIBIA



**Led** 2700K CRI >80 20591 lm 109 lm/W

**Fixture:** 8213 lm 0 lm/W

**Driver included:** CC - Constant Current 350 mA 100-240V 50/60Hz

**Electronic dimming** DALI 1-10V PUSH

**ficha.fichatecnicaproducto.regulacion.opcional** SMART

## Physical characteristics

2 Box / 0.09 x 1.62 x 1.63 m. / Vol. 0.5035 m<sup>3</sup> /

Gross weight 56.0 kg. / Net weight 46.0 kg.


## Installation and assembly

Please, see the installation manual

## Light distribution

### General lighting

Lamp for general lighting that equally distributes the light in all directions.



## Photometric data

Efficiency : 39.88%

Coordinate system : CG

Total flux : 20591.30

Maximum value : 54.83


Light position : C=40.00 G=50.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

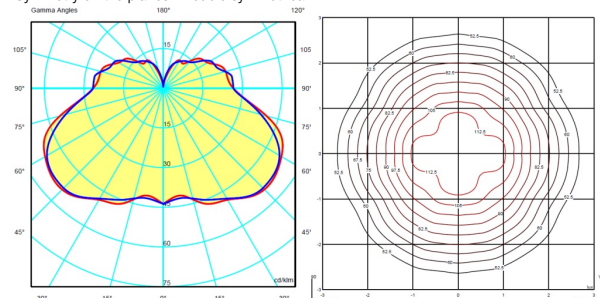

## Certificates

