

# PLUS

Design by X. Claramunt and M. de Mas.

## Reference

**0605.**

## Application

Ceiling Lamps

## Installation type

Surface

## Description

Asymmetrical ceiling light, designed by X. Claramunt and M. de Mas. Direct, diffuse and uniform light distribution. Convex methacrylate diffuser and matt white lacquer finish, though the whole fixture can be painted in the desired colour to make it blend perfectly into the ceiling. Its large size makes it ideal for lighting large spaces from a single point and its form recalls a real skylight. Features dimmable electronic ballast (DALI System).

## Diffuser

Methacrylate diffuser

## Materials


Body: Polyurethane foam  
Diffuser: Methacrylate

## Finish



**0605-03** Matt white lacquer (RAL 9010)

## Sketch

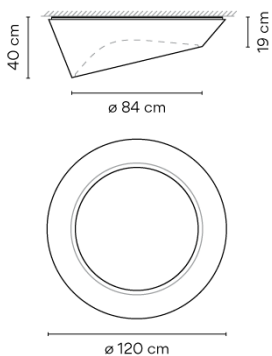


## Electrical characteristics

2 x G5 230V 24W (T5)  
AND  
4 x G5 230V 39W (T5)

Total 204.0 W



# VIBIA

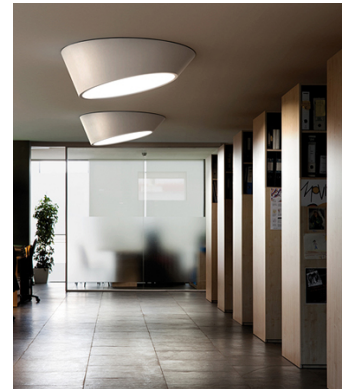

**Fixture:** 6711 lm 33 lm/W

**Driver included:** CV - Contant Voltage 230V 50Hz

**Electronic dimming** DALI PUSH

## Technical characteristics

- Dimmable electronic ballast DALI System and Push.
- Surface
- Easy-to-install and replace bulb system

## Physical characteristics

1 Box / 0.49 x 1.37 x 1.37 m. / Vol. 0.9129 m<sup>3</sup> /  
Gross weight 37.6 kg. / Net weight 33.8 kg.


## Installation and assembly

Please, see the installation manual

## Light distribution

### General lighting

Lamp for general lighting that equally distributes the light in all directions.



## Photometric data

Efficiency : 42.21%

Coordinate system : CG

Total flux : 15900.00 lm

Maximum value : 146.30 cd/klm


Light position : C=90.00 G=10.00

Symmetry on the planes : Asymmetric

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=3.00m

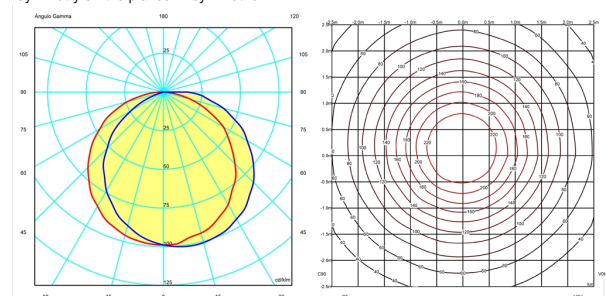

## Certificates

VIBIA LIGHTING, S.L.U. Barcelona, 72 - 74. 08820 El Prat de Llobregat (Barcelona - Spain). Tel 934 796 970. Fax 934 796 973.



