

# PLUS

Design by X. Claramunt and M. de Mas.

## Reference

**0635.**

## Application

Outdoor lamps

## Installation type

Semi built-in

## Description

Semi-recessed ceiling light, designed by X. Claramunt and M. de Mas. Convex methacrylate diffuser and matt white lacquer finish, though the whole fixture can be painted in the desired colour to make it blend perfectly into the ceiling. Its form recalls a real skylight. Features dimmable electronic ballast (DALI System).

## Diffuser

Methacrylate diffuser

## Materials

Body: Polyurethane foam


Diffuser: Methacrylate

## Finish



**0635-03** Matt white lacquer (RAL 9010)

## Sketch



## Electrical characteristics

1 x 2GX13 230V 55W (T5C)



Total 55.0 W

A

# VIBIA



**Fixture:** 1074 lm 20 lm/W

**Driver included:** CV - Contant Voltage 230V 50Hz

**Electronic dimming** DALI PUSH

## Technical characteristics

- Dimmable electronic ballast DALI System and Push.

## Physical characteristics

2 Box / 0.35 x 0.49 x 0.49 m. / Vol. 0.1281 m<sup>3</sup> /

Gross weight 3.8 kg. / Net weight 3.4 kg.


## Installation and assembly

Please, see the installation manual

## Light distribution

### General lighting

Lamp for general lighting that equally distributes the light in all directions.



## Photometric data

Efficiency : 25.58%

Coordinate system : CG

Total flux : 4200.00 lm

Maximum value : 86.44 cd/klm


Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=3.00m

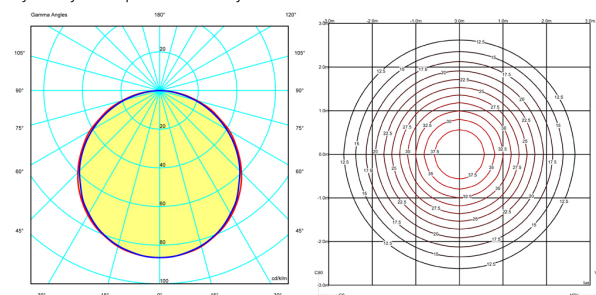

## Certificates

