

I.CONO

Design by Lievore Altherr Molina.

Reference

0725.

Application

Wall Lamps

Installation type

Surface

Description

Wall light for reading. Designed by Lievore, Altherr, Molina. The mechanisms for rotating the head and the base are concealed, thanks to the high technical quality of all the processes involved in the creation of this piece. Available in four finishes: gloss white and black lacquer and matt mink and white lacquer. Switch in the cable.

Diffuser

Polycarbonate diffuser

Materials

Shade: Polycarbonate

Base: Zamak

Vertical tube: Steel

Finish



0725-03 Shiny white lacquer (RAL 9016)



0725-04 Shiny black lacquer (RAL 9005)




0725-59 Matt mink lacquer (Pantone 406C)



0725-93 Matt white lacquer (RAL 9016)

Sketch



Electrical characteristics

1 x LEDSTAR CLASS.P40 E14 230V 6W

Total 6.0 W



OR

1 x FLUORESCENT E14 230V 15W (MEGALUMINUM)

Total 15.0 W

www.vibia.com



OR

VIBIA



Fixture: 307 lm 7 lm/W

Driver included: CV - Contant Voltage 230V 50Hz

Technical characteristics

- Switch on the cable

Physical characteristics

1 Box / 0.26 x 0.51 x 0.51 m. / Vol. 0.0676 m³ /

Gross weight 2.5 kg. / Net weight 2.3 kg.


Installation and assembly

Please, see the installation manual

Light distribution

Reading

Lamp having a light beam whose main function is to supply sufficient light for reading.



Photometric data

Efficiency : 53.78%

Coordinate system : CG

Total flux : 570.00 lm

Maximum value : 194.22 cd/klm

Light position : C=285.00 G=10.00


Symmetry on the planes : Symmetrical planes

270-90

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=3.00m

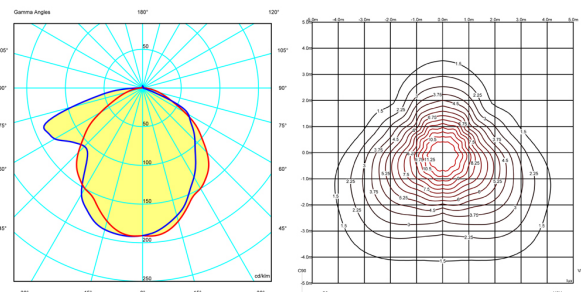

Certificates



1 x E14 230V 46W Eco

Total 46.0 W

