

PIN

Design by Ichiro Iwasaki.

Reference

1675.

Application

Wall Lamps

Installation type

Surface

Description

Wall lamp. Design by Ichiro Iwasaki. Wall light for reading, ideal for bedrooms. The diffuser can turn and rotate to bring the light to where it is needed. Available in white, black, cream and green matt finishes.

Diffuser

Polycarbonate diffuser

Materials

Head: Aluminium

Base: Zamak

Diffuser: Polycarbonate

Rods: Steel

Finish



1675-04 Matt black lacquer (NCS 9000N)



1675-58 Matt cream lacquer (NCS S 2005-Y20R)




1675-62 Matt green lacquer (NCS S 3010-G20Y)



1675-93 Matt white lacquer (NCS S 0502-Y)

Sketch



Electrical characteristics


1 x LED 4,5W 350mA



Total 4.5 W

VIBIA LIGHTING, S.L.U. Barcelona, 72 - 74. 08820 El Prat de Llobregat (Barcelona - Spain). Tel 934 796 970. Fax 934 796 973.
vibia@vibia.com www.vibia.com

VIBIA



Led 2700K CRI >80 450 lm 109 lm/W

Fixture: 208 lm 0 lm/W

Driver included: CC - Constant Current 350 mA 100-240V 50/60Hz

Electronic dimming NO DIM

Physical characteristics

1 Box / 0.15 x 0.16 x 0.19 m. / Vol. 0.0045 m³ /

Gross weight 0.9 kg. / Net weight 0.6 kg.


Installation and assembly

Please, see the installation manual

Light distribution

Reading

Lamp having a light beam whose main function is to supply sufficient light for reading.



Photometric data

Efficiency : 46.31%

Coordinate system : CG

Total flux : 449.94

Maximum value : 193.70

Light position : C=75.00 G=5.00


Symmetry on the planes : Symmetrical planes

270-90

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=1.80m

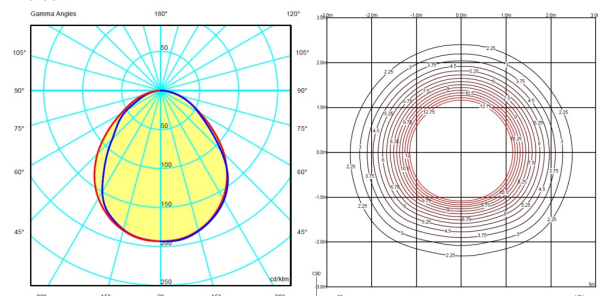

Certificates



