

PIN

Design by Ichiro Iwasaki.

Reference

1694.

Application

Wall Lamps

Installation type

Surface

Description

Wall lamp. Design by Ichiro Iwasaki. Wall light which provides passageways with ambient illumination via indirect light. Available in white, black, cream and green matt finishes.

Diffuser

Polycarbonate diffuser

Materials

Head: Aluminium

Base: Zamak

Diffuser: Polycarbonate

Rods: Steel

Finish



1694-04 Matt black lacquer (NCS 9000N)



1694-58 Matt cream lacquer (NCS S 2005-Y20R)




1694-62 Matt green lacquer (NCS S 3010-G20Y)



1694-93 Matt white lacquer (NCS S 0502-Y)

Sketch



Electrical characteristics

2 x LED 4,5W 350mA

Total 9.0 W



VIBIA LIGHTING, S.L.U. Barcelona, 72 - 74. 08820 El Prat de Llobregat (Barcelona - Spain). Tel 934 796 970. Fax 934 796 973.
vibia@vibia.com www.vibia.com

VIBIA



Led 2700K CRI >80 900 lm 109 lm/W

Fixture: 417 lm 0 lm/W

Driver included: CC - Constant Current 350 mA 100-240V 50/60Hz

Electronic dimming NO DIM

Physical characteristics

1 Box / 0.18 x 0.45 x 0.79 m. / Vol. 0.0623 m³ /

Gross weight 2.8 kg. / Net weight 1.4 kg.


Installation and assembly

Please, see the installation manual

Light distribution

Indirect lighting

Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.



Photometric data

Efficiency : 46.35%

Coordinate system : CG

Total flux : 900.00

Maximum value : 192.66


Light position : C=340.00 G=10.00

Symmetry on the planes : Asymmetric

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

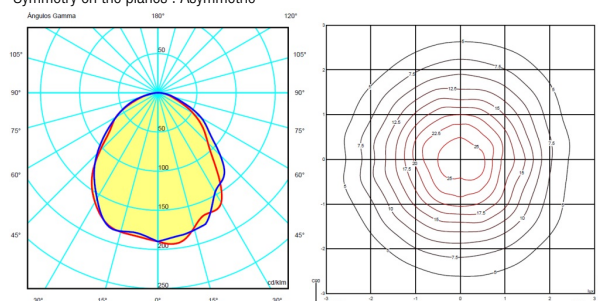

Certificates



