

# FUNNEL

Design by .

## Reference

**2004.**

## Application

Ceiling Lamps

## Installation type

Surface

## Description

Light for ceiling or wall fitting. Gives an indirect light which is ideal for creating a cosy atmosphere in any room. Non-dazzle. Available in five finishes: red, black and white lacquer, chrome and gold leaf.

## Diffuser

Aluminium diffuser

## Materials

Reflector: Aluminum

Wall plate: Steel

Body: Aluminum

## Finish



**2004-01** Chrome (Metallic finish)



**2004-03** Shiny white lacquer (RAL 9003)




**2004-04** Black lacquer (RAL 9005)



**2004-06** Red lacquer (RAL 3002)

## Sketch




## Electrical characteristics

2 x G9 230V 60W Eco

Total 120.0 W

# VIBIA

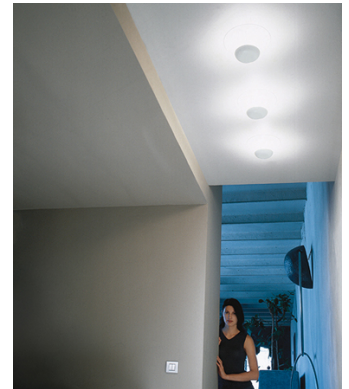

**Fixture:** 507 lm 4 lm/W

**Driver included:** CC - Constant Current 230V 50/60Hz

## Physical characteristics

1 Box / 0.27 x 0.27 x 0.16 m. / Vol. 0.0116 m<sup>3</sup> /

Gross weight 0.9 kg. / Net weight 0.8 kg.


## Installation and assembly

Please, see the installation manual

## Light distribution

### Indirect lighting

Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.



## Photometric data

Efficiency : 48.65%

Coordinate system : CG

Total flux : 1960.00 lm

Maximum value : 199.07 cd/klm


Light position : C=90.00 G=115.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=3.00m

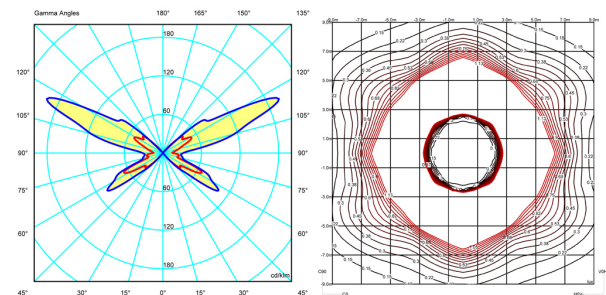

## Certificates



