

FUNNEL

Design by Ramón Benedito.

Reference

2005.

Application

Ceiling Lamps

Installation type

Surface

Description

Light for ceiling fitting with rose and white diffuser. Gives an indirect light which is ideal for creating a cosy atmosphere in any room. Non-dazzle.

Materials

Reflector: Aluminum

Wall plate: Steel


Body: Aluminum

Finish



2005-03 White lacquer (RAL 9003)

Sketch



Electrical characteristics

3 x G9 230V 48W Eco



Total 144.0 W



VIBIA



Fixture: 1391 lm 10 lm/W

Driver included: CC - Constant Current 230V 50/60Hz

Physical characteristics

1 Box / 0.25 x 0.42 x 0.42 m. / Vol. 0.0360 m³ /

Gross weight 2.0 kg. / Net weight 1.8 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 62.66%

Coordinate system : CG

Total flux : 2220.00 lm

Maximum value : 133.50 cd/klm

Light position : C=75.00 G=115.00


Symmetry on the planes : Symmetrical planes

0-180

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=3.00m

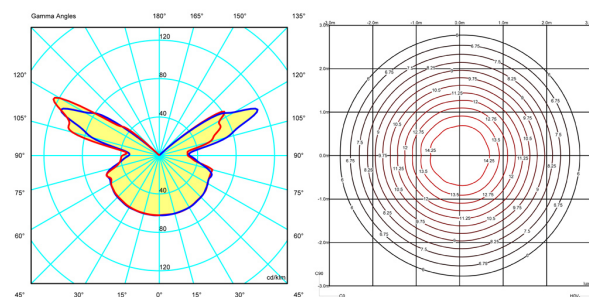

Certificates

