

ORIGAMI

Design by Ramón Esteve.

Reference

4501.

Application

Wall Lamps

Installation type

Surface

Description

ORIGAMI blends light functionality with an opportunity for artistic creation. With just two pieces, designers can create infinite compositions. With a single connection point between the pieces and simple surface mounting installation, you can make as many configurations as you desire. ORIGAMI lighting is rated for both outdoor (IP65) and indoor settings which you can construct to climb a wall or façade like ivy. The light source is LED, guaranteeing high-efficiency energy consumption.

Diffuser

Polycarbonate diffuser

Materials

Shade: ABS

Diffuser: Polycarbonate

Lid: Polycarbonate

Arm: Polycarbonate

Finish



4501-03 Matt white lacquer (RAL 9016)




4501-07 Green oxide lacquer (RAL 6020)



4501-54 Matt oxide lacquer (RAL 8017)

Sketch



Electrical characteristics

1 x LED STRIP 6,3W 350mA




Total 6.3 W



VIBIA LIGHTING, S.L.U. Barcelona, 72 - 74. 08820 El Prat de Llobregat (Barcelona - Spain). Tel 934 796 970. Fax 934 796 973.
vibia@vibia.com www.vibia.com

VIBIA



Led 2700K CRI >80 756 lm 120 lm/W

Fixture: 460 lm 73 lm/W

Driver included: CC - Constant Current 350 mA 230V 50/60Hz

Electronic dimming TRIAC

Technical characteristics

- A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system.

Physical characteristics

1 Box / 0.35 x 0.35 x 0.12 m. / Vol. 0.0166 m³ /

Gross weight 1.5 kg. / Net weight 1.4 kg.


Installation and assembly

Please, see the installation manual


Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

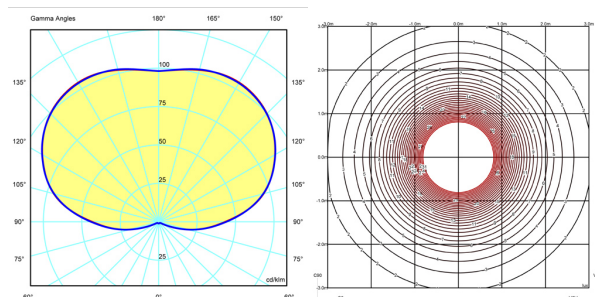

Certificates



