

# ORIGAMI

Design by Ramón Esteve.

## Reference

**4504.**

## Application

Wall Lamps

## Installation type

Surface

## Description

ORIGAMI blends light functionality with an opportunity for artistic creation. With just two pieces, designers can create infinite compositions. With a single connection point between the pieces and simple surface mounting installation, you can make as many configurations as you desire. ORIGAMI lighting is rated for both outdoor (IP65) and indoor settings which you can construct to climb a wall or façade like ivy. The light source is LED, guaranteeing high-efficiency energy consumption.

## Diffuser

Polycarbonate diffuser

## Materials

Shade: ABS

Diffuser: Polycarbonate

Lid: Polycarbonate

Arm: Polycarbonate

## Finish



**4504-03** Matt white lacquer (RAL 9016)




**4504-07** Green oxide lacquer (RAL 6020)



**4504-54** Matt oxide lacquer (RAL 8017)

## Sketch



## Electrical characteristics


2 x LED STRIP 6,3W 350mA

Total 12.6 W



VIBIA LIGHTING, S.L.U. Barcelona, 72 - 74. 08820 El Prat de Llobregat (Barcelona - Spain). Tel 934 796 970. Fax 934 796 973.  
vibia@vibia.com www.vibia.com

# VIBIA



Led 2700K CRI >80 1513 lm 120 lm/W

Fixture: 854 lm 68 lm/W

Driver included: CC - Constant Current 350 mA 230V 50/60Hz

Electronic dimming TRIAC

## Technical characteristics

- A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system.

## Physical characteristics

2 Box / 0.26 x 0.51 x 0.51 m. / Vol. 0.1002 m<sup>3</sup> /  
Gross weight 3.9 kg. / Net weight 3.5 kg.

## Installation and assembly

Please, see the installation manual


## Light distribution

### Indirect lighting

Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.



## Photometric data

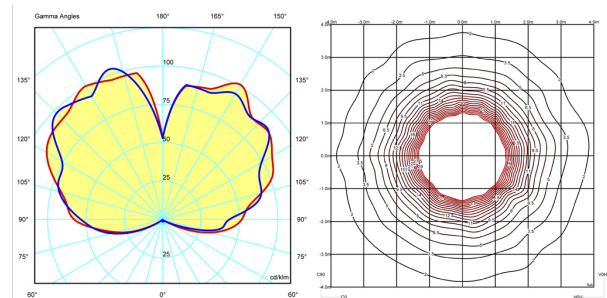

## Certificates



