

LINK

Design by Ramón Esteve.

Reference

5395.

Application

Ceiling Lamps

Installation type

Surface

Description

Geometry as decor... The Link is a series of preconfigured geometric patterns that can be arranged across the canvas of a ceiling. These configurations have shallow profiles making them ideal for residential and hospitality settings or anywhere with low ceilings. The combinations of different rectangular shapes create surface fixtures of different sizes, with up to five combined cubist forms.

Diffuser

Methacrylate diffuser

Materials

Box: Polyurethane

Diffuser: Methacrylate

Finish




5395-03 Shiny white lacquer (RAL 9010)



5395-18 Shiny graphite lacquer (RAL 7016)

Sketch

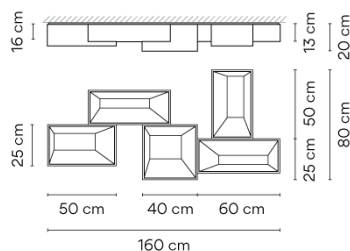

Electrical characteristics

12 x 2G11 230V 24W

AND

8 x 2G11 230V 18W



Total 432.0 W



VIBIA



Fixture: 5919 lm 14 lm/W

Driver included: CV - Contant Voltage 230V 50Hz

Electronic dimming DALI PUSH

Technical characteristics

- Dimmable electronic ballast DALI System and Push.

Physical characteristics

1 Box / 0.45 x 0.95 x 0.95 m. / Vol. 0.4151 m³ /

Gross weight 32.2 kg. / Net weight 29.0 kg.

Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 18.97%

Coordinate system : CG

Total flux : 31200.00 lm

Maximum value : 60.16 cd/klm


Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=3.00m

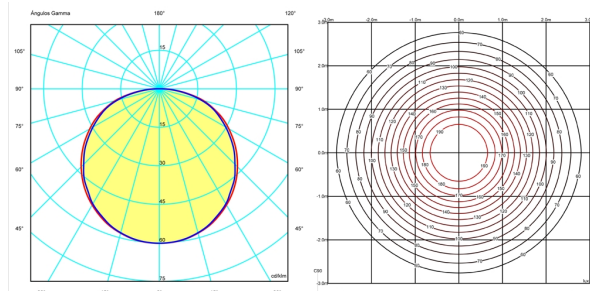

Controlador 3.



