

PUCK

Design by Jordi Vilardell.

Reference

5427.

Application

Wall Lamps

Installation type

Surface

Description

Panel light designed by Jordi Vilardell. The use of top-quality opal triplex glass and injection-moulded aluminium gives the product a perfect finish. The product gives a warm light without shadows or glare. LED version.

Diffuser

Mat opal triplex blown-glass diffuser

Materials


Diffuser: Blown-glass

Finish



5427-03 White (RAL 9016)

Sketch



Electrical characteristics


2 x LED PLATE 3W 350mA



Total 6.0 W



VIBIA



LED 2700K CRI >80 671 lm 112 lm/W

Fixture: 428 lm 71 lm/W

Driver included: CC - Constant Current 350 mA 100-240V 50/60Hz

Electronic dimming NO DIM

Technical characteristics

- Only one electric connection

Physical characteristics

1 Box / 0.26 x 0.26 x 0.26 m. / Vol. 0.0175 m³ /

Gross weight 1.6 kg. / Net weight 1.4 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 63.83%

Coordinate system : CG

Total flux : 670.60 lm

Maximum value : 148.49 cd/klm


Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=3.00m

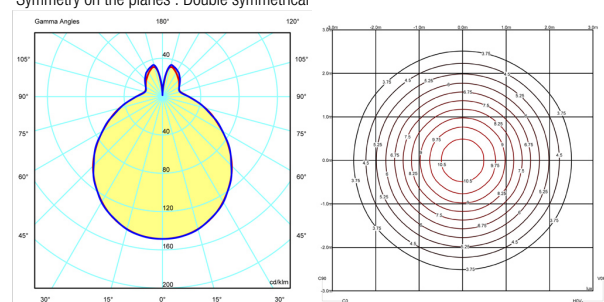

Certificates



