

PUCK

Design by Jordi Vilardell.

Reference

5445.

Application

Ceiling Lamps

Installation type

Surface

Description

Seven-sphere multiple panel light with a single connection point designed by Jordi Vilardell. The use of top-quality opal triplex glass and injection-moulded aluminium gives the product a perfect finish. It gives a warm light without shadows or glare.

Diffuser

Mat opal triplex blown-glass diffuser

Materials


Diffuser: Blown-glass

Finish



5445-03 White (RAL 9016)

Sketch



Electrical characteristics


7 x G9 230V 48W Eco



Total 336.0 W



VIBIA



Fixture: 2147 lm 6 lm/W

Driver included: CV - Contant Voltage 230V 50Hz

Technical characteristics

- Only one electric connection

Physical characteristics

2 Box / 0.86 x 0.42 x 0.42 m. / Vol. 0.1902 m³ /

Gross weight 12.2 kg. / Net weight 11.0 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 41.44%

Coordinate system : CG

Total flux : 5180.00 lm

Maximum value : 106.99 cd/klm


Light position : C=90.00 G=5.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=3.00m

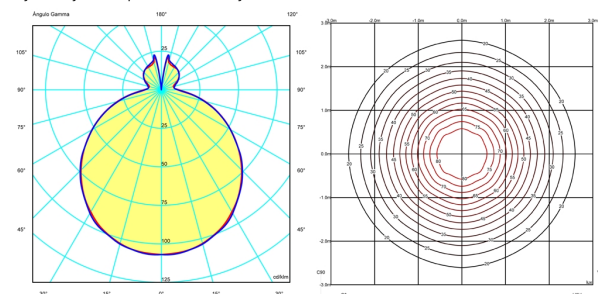

Certificates



