

BEGA**55 014**

Garden luminaire

IP 65

Project · Reference number

Date

Product data sheet

Application

Portable garden luminaire with bottom plate, mains supply cable and power plug, which is standing on the floorspace without any fixation. The white plastic sphere reduces the luminance of the lamp to a considerable extent and distributes the light softly and uniformly over the whole surface.

For an accentuating and sensational illumination at the house or in the private garden.

Product description

Luminaire with bottom plate made of stainless steel

Steel grade no. 1.4301

White synthetic sphere

Ready for connection with

5 m connecting cable H05RN-F 3 × 1[□] and mains plug.

Lampholder E 27

Safety class I

Protection class · safety plug IP X4

Protection against splash water

Protection class · luminaire IP 65

Dust tight luminaires and protected against water jets

Impact strength IK10

Protection against mechanical

impacts < 20 joule

CE – Conformity mark

Weight: 2.6 kg

Lamp

Luminaire with lampholder E 27

Lamp output max. 100 W

For this luminaire we recommend the following BEGA LED lamps:

13510 LED 7 W · 805 lm · 2700 K

13548 LED 7 W · 805 lm · 2700 K
dimnable

13584 LED 7 W · 805 lm · 3000 K

13586 LED 7 W · 805 lm · 3000 K
dimnable

13512 LED 8 W · 1055 lm · 2700 K

13564 LED 12 W · 1400 lm · 2700 K

13565 LED 12 W · 1400 lm · 2700 K
dimnable

13588 LED 8 W · 1055 lm · 3000 K

13590 LED 12 W · 1400 lm · 3000 K

13592 LED 12 W · 1400 lm · 3000 K
dimnable


Radio-controlled version (Zigbee 3.0):

13555 LED 9 W · 805 lm · 2700 K
dimnable

13556 LED 9 W · 805 lm · 2700-6500 K
dimnable · tunable white

13557 LED 9.5 W · 805 lm · 2700-6500 K
dimnable · tunable white · RGBW

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

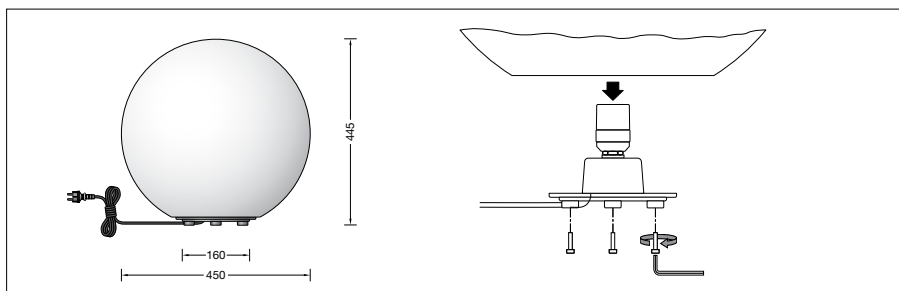

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Accessories

For the electrical connection, we recommend the BEGA connecting pillars with safety sockets. You can find them on our website at www.bega.com.