

KAP Ø145

Number of heads	1
Mounting	Ceiling recessed
Lamps description	Phosphor LED 17W 1400 lm 3000K CRI 98
Luminaire luminous flux	Extreme Cut-off. See reference number
Environment	Indoor
Notes	Pre-installation frame. To be ordered separately.

OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	53°

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic
Emergency	Without
Insulation class	Class II

PHYSICAL


Cutout diameter (mm)	165
Diameter (mm)	145
Recessed depth (mm)	195
Construction material	Die-cast aluminum
Weight (kg)	0,88





Kap Ø145
designed by FLOS Architectural

Recessed luminaire with LED light source. Remote electronic transformer 220/240V included.

○ 03.4420.B1C - 803lm	White
● 03.4420.GLC - 796lm	Gold
● 03.4420.BUC - 563lm	Blue
● 03.4420.74C - 580lm	Black
● 03.4420.CUC - 796lm	Copper

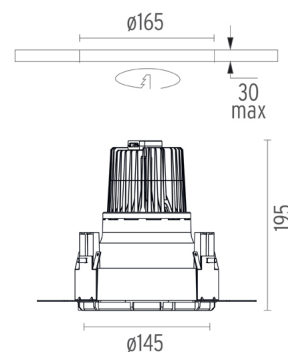


CERTIFICATIONS

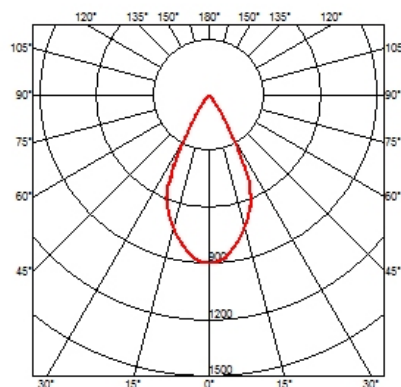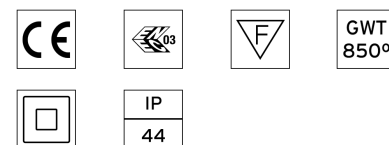

FLOS

Kap Ø145 . Accessories

Mounting

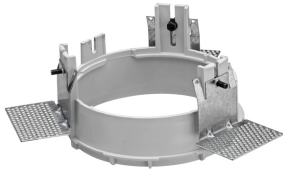

○ 08.8156.00

Installation Frame No Trim



○ 08.8421.00

Installation can for concrete KAP Ø145



○ 08.8491.30


● 08.8491.GL

● 08.8491.BU

● 08.8491.14

Installation Frame Trim

Installation frame Kap Ø145/ Kap Ø145 wall washer. Copper finish trim frame not available. Combine with withe or any of the other finishes according to the desired final aesthetic effect.

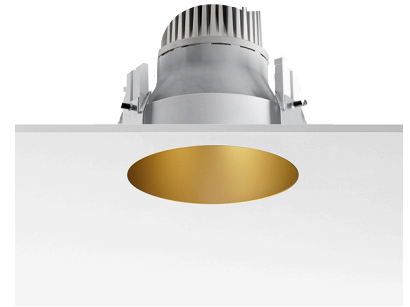

Kap Ø145
designed by FLOS Architectural

Recessed luminaire with LED light source. Remote electronic transformer 220/240V included.

○ 03.4420.BIC - 803lm	White
● 03.4420.GLC - 796lm	Gold
● 03.4420.BUC - 563lm	Blue
● 03.4420.74C - 580lm	Black
● 03.4420.CUC - 796lm	Copper

Kap Ø145 . Lamps




Phosphor LED

Lamp category:

LED

Lamp type:

Phosphor LED



CERTIFICATIONS

