

Vector Track 95 35W 60° 4000K DALI Brushed Bronze



IP20  Dimmerable: +  -


DESIGN BY

Carlotta de Bevilacqua

DESCRIPTION

Three sizes with three different beam angles each (spot, flood, wide flood) obtained by means of refractive or hybrid optical units. Vector 55 track DALI zoom optic (22°-32°). Junction arm integrated in the spotlight's body to keep the barycentre aligned with the track and prevent any imbalance in possible suspension versions of the track. The junction allows 360° rotation and 90° tilting for maximum emission adjustment freedom. Vector 95 available only in track version. Version with compact 4-conductor (3p+n) adapter with hidden LED driver and not-dimmable phase selector.

TECHNICAL DRAWINGS

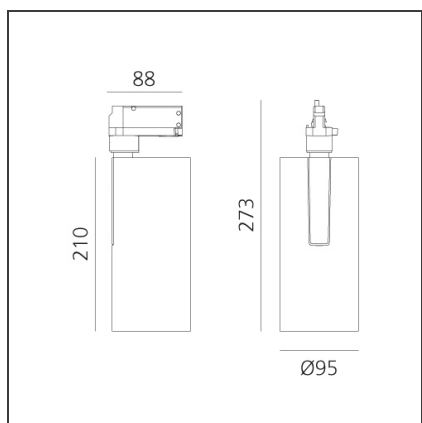

FEATURES

| | | | |
|---------------|------------------|---------|---------------------|
| Article Code: | AN25820 | Series: | Indoor, 2018 |
| Colour: | Brushed Bronze | | Artemide Collection |
| Installation: | Projector, Track | | |
| Environment: | Indoor | | |

DIMENSIONS

| | |
|--------------|---------|
| Height: | cm 27.3 |
| Inclination: | -90+90 |
| Rotation: | cm 360 |

INCLUDED SOURCES

| | | | |
|-----------|-----|------------------------|-------|
| Category: | LED | Color temperature (K): | 4000K |
| Number: | 1 | CRI: | 90 |
| Watt: | 35W | | |
| Type: | 0 | | |
| Class: | A | | |

LUMINAIRE

| | | | |
|-------|-----|-------------------------------|--------|
| Watt: | 35W | Delivered lumens output (lm): | 3119lm |
| | | CCT: | 4000K |
| | | CRI: | 90 |
| | | Dimmable Typology: | Dali |

Notes

220/240Vac 50/60Hz Electronic ballast included.

ACCESSORIES

Adjustable
dowsers
M059910




Lens for elliptical
emission
M282007



Anti-dazzle louvre
M282100



Accessories holder
- Vector 95
AP92100



Soft filter
M056807