

Vesto Single

350mA/500mA

Type Downlight
Mounting Recessed
Material Aluminium
Adjustable No
El. class / IP Class III / IP20
El. class driver Class II
Warranty: see p.308


CREE CXB LED (350mA)

CCT 2700K / 3000K / 4000K
CRI Ra90
SDCM 3
Luminous Flux LED
2700K - Ra90: 346lm (115lm/W)
3000K - Ra90: 374lm (125lm/W)
4000K - Ra90: 401lm (134lm/W)
Luminous Flux System
2700K - Ra90: 280lm (82lm/W)
3000K - Ra90: 302lm (88lm/W)
4000K - Ra90: 324lm (95lm/W)
LED Power 3.0W (excl. driver)
System Power 3.4W (incl. driver)
Current 350mA
Forward voltage 8.6V (typ.)

CREE CXB LED (500mA)

CCT 2700K / 3000K / 4000K
CRI Ra90
SDCM 3
Luminous Flux LED
2700K - Ra90: 468lm (106lm/W)
3000K - Ra90: 505lm (115lm/W)
4000K - Ra90: 542lm (123lm/W)
Luminous Flux System
2700K - Ra90: 378lm (86lm/W)
3000K - Ra90: 408lm (93lm/W)
4000K - Ra90: 438lm (100lm/W)
LED Power 4.4W (excl. driver)
System Power 5.0W (incl. driver)
Current 500mA
Forward voltage 8.9V (typ.)

 52x52mm (+4/-0)

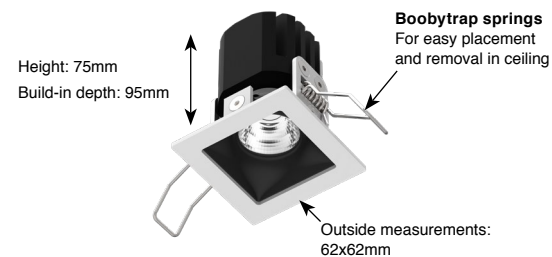


Weight: 200g
(excl. driver)



Driver:
- Included in article number and included in price
- External/Remote installation

Data sheets and wiring guide: see website
Driver information: see p.294-295

Air circulation notice:
Do not topload with insulation materials

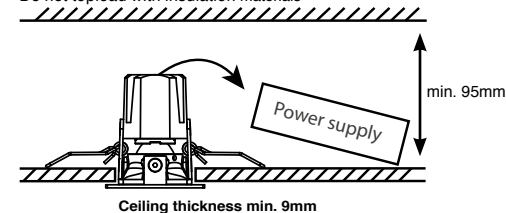



Vesto 350

Single

PRICES INCL. DRIVERS

Non dim 350mA (Driver 493.24.15 incl.)

2700K - Ra90 - 3.4W - 346lm	1066.AA.24.927.XX
3000K - Ra90 - 3.4W - 374lm	1066.AA.24.930.XX
4000K - Ra90 - 3.4W - 401lm	1066.AA.24.940.XX

1-10V dim & Push dim 350mA (Driver 490.25.20 incl.)

2700K - Ra90 - 3.4W - 346lm	1066.AA.25.927.XX
3000K - Ra90 - 3.4W - 374lm	1066.AA.25.930.XX
4000K - Ra90 - 3.4W - 401lm	1066.AA.25.940.XX

DALI dim 350mA (Driver 490.26.20 incl.)

2700K - Ra90 - 3.4W - 346lm	1066.AA.26.927.XX
3000K - Ra90 - 3.4W - 374lm	1066.AA.26.930.XX
4000K - Ra90 - 3.4W - 401lm	1066.AA.26.940.XX

Mains dim

1x Vesto Single: not available

2x Vesto Single connected in series: on request*

3x/4x Vesto Single connected in series: on request*

*max. distance driver to last Vesto in loop: 15m (wire diam. min. 1mm²)



Vesto 500 NEW!

Single

PRICES INCL. DRIVERS

Non dim 500mA (Driver 493.24.22 incl.)

2700K - Ra90 - 5.0W - 468lm	1096.AA.24.927.XX
3000K - Ra90 - 5.0W - 505lm	1096.AA.24.930.XX
4000K - Ra90 - 5.0W - 542lm	1096.AA.24.940.XX

1-10V dim & Push dim 500mA (Driver 490.25.20 incl.)

2700K - Ra90 - 5.0W - 468lm	1096.AA.25.927.XX
3000K - Ra90 - 5.0W - 505lm	1096.AA.25.930.XX
4000K - Ra90 - 5.0W - 542lm	1096.AA.25.940.XX

DALI dim 500mA (Driver 490.26.20 incl.)

2700K - Ra90 - 5.0W - 468lm	1096.AA.26.927.XX
3000K - Ra90 - 5.0W - 505lm	1096.AA.26.930.XX
4000K - Ra90 - 5.0W - 542lm	1096.AA.26.940.XX

Mains dim 500mA (Driver 493.27.20 incl.)

2700K - Ra90 - 5.0W - 468lm	1096.AA.27.927.XX
3000K - Ra90 - 5.0W - 505lm	1096.AA.27.930.XX
4000K - Ra90 - 5.0W - 542lm	1096.AA.27.940.XX

36° Reflector: 0000.36.00.000.00

55° Reflector: 0000.55.00.000.00

Available colors: 0000.00.00.000.XX

Other RAL colors on request

01



White
Standard

18



Grey
Standard

03



Black
Standard

05



White + Black
Standard

16



Gold Matt

11



Black + Gold Matt

Vesto Double

350mA/500mA

Type	Downlight
Mounting	Recessed
Material	Aluminium
Adjustable	No
El. class / IP	Class III / IP20
El. class driver	Class II
Warranty:	see p.308


CREE CXB LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Luminous Flux LED	2700K - Ra90: 346lm (115lm/W) 3000K - Ra90: 374lm (125lm/W) 4000K - Ra90: 401lm (134lm/W)
Luminous Flux System	2700K - Ra90: 280lm (82lm/W) 3000K - Ra90: 302lm (88lm/W) 4000K - Ra90: 324lm (95lm/W)
LED Power	3.0W (excl. driver)
System Power	3.4W (incl. driver)
Current	350mA
Forward voltage	8.6V (typ.)

CREE CXB LED (500mA)


CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Luminous Flux LED	2700K - Ra90: 468lm (106lm/W) 3000K - Ra90: 505lm (115lm/W) 4000K - Ra90: 542lm (123lm/W)
Luminous Flux System	2700K - Ra90: 378lm (86lm/W) 3000K - Ra90: 408lm (93lm/W) 4000K - Ra90: 438lm (100lm/W)
LED Power	4.4W (excl. driver)
System Power	5.0W (incl. driver)
Current	500mA
Forward voltage	8.9V (typ.)

 52x93mm (+4/-0)

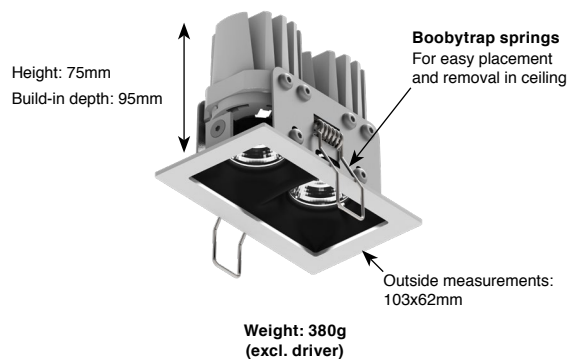

Driver:
- Included in article number and included in price
- External/Remote installation

Data sheets and wiring guide: see website
Driver information: see p.294-295

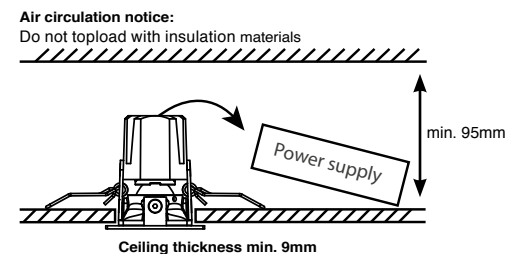



Vesto 350

Double

PRICES INCL. DRIVERS

Non dim 350mA (Driver 493.24.15 incl.)

(2x) 2700K - Ra90 - 3.4W - 346lm	1067.AA.24.927.XX
(2x) 3000K - Ra90 - 3.4W - 374lm	1067.AA.24.930.XX
(2x) 4000K - Ra90 - 3.4W - 401lm	1067.AA.24.940.XX

1-10V dim & Push dim 350mA (Driver 490.25.20 incl.)

(2x) 2700K - Ra90 - 3.4W - 346lm	1067.AA.25.927.XX
(2x) 3000K - Ra90 - 3.4W - 374lm	1067.AA.25.930.XX
(2x) 4000K - Ra90 - 3.4W - 401lm	1067.AA.25.940.XX

DALI dim 350mA (Driver 490.26.20 incl.)

(2x) 2700K - Ra90 - 3.4W - 346lm	1067.AA.26.927.XX
(2x) 3000K - Ra90 - 3.4W - 374lm	1067.AA.26.930.XX
(2x) 4000K - Ra90 - 3.4W - 401lm	1067.AA.26.940.XX

Mains dim 350mA (Driver 490.27.20 incl.)

(2x) 2700K - Ra90 - 3.4W - 346lm	1067.AA.27.927.XX
(2x) 3000K - Ra90 - 3.4W - 374lm	1067.AA.27.930.XX
(2x) 4000K - Ra90 - 3.4W - 401lm	1067.AA.27.940.XX



Vesto 500 NEW!

Double

PRICES INCL. DRIVERS

Non dim 500mA (Driver 493.24.22 incl.)

(2x) 2700K - Ra90 - 5.0W - 468lm	1097.AA.24.927.XX
(2x) 3000K - Ra90 - 5.0W - 505lm	1097.AA.24.930.XX
(2x) 4000K - Ra90 - 5.0W - 542lm	1097.AA.24.940.XX

1-10V dim & Push dim 500mA (Driver 490.25.20 incl.)

(2x) 2700K - Ra90 - 5.0W - 468lm	1097.AA.25.927.XX
(2x) 3000K - Ra90 - 5.0W - 505lm	1097.AA.25.930.XX
(2x) 4000K - Ra90 - 5.0W - 542lm	1097.AA.25.940.XX

DALI dim 500mA (Driver 490.26.20 incl.)

(2x) 2700K - Ra90 - 5.0W - 468lm	1097.AA.26.927.XX
(2x) 3000K - Ra90 - 5.0W - 505lm	1097.AA.26.930.XX
(2x) 4000K - Ra90 - 5.0W - 542lm	1097.AA.26.940.XX

Mains dim 500mA (Driver 493.27.20 incl.)

(2x) 2700K - Ra90 - 5.0W - 468lm	1097.AA.27.927.XX
(2x) 3000K - Ra90 - 5.0W - 505lm	1097.AA.27.930.XX
(2x) 4000K - Ra90 - 5.0W - 542lm	1097.AA.27.940.XX

36° Reflector: 0000.36.00.000.00
55° Reflector: 0000.55.00.000.00

Available colors: 0000.00.00.000.XX
Other RAL colors on request

01



White
Standard

18



Grey
Standard

03



Black
Standard

05



White + Black
Standard

16



Gold Matt

11



Black + Gold Matt

Vesto Triple

350mA/500mA

Type	Downlight
Mounting	Recessed
Material	Aluminium
Adjustable	No
El. class / IP	Class III / IP20
El. class driver	Class II
Warranty: see p.308	


CREE CXB LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Luminous Flux LED	2700K - Ra90: 346lm (115lm/W) 3000K - Ra90: 374lm (125lm/W) 4000K - Ra90: 401lm (134lm/W)
Luminous Flux System	2700K - Ra90: 280lm (82lm/W) 3000K - Ra90: 302lm (88lm/W) 4000K - Ra90: 324lm (95lm/W)
LED Power	3.0W (excl. driver)
System Power	3.4W (incl. driver)
Current	350mA
Forward voltage	8.6V (typ.)

CREE CXB LED (500mA)


CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Luminous Flux LED	2700K - Ra90: 468lm (106lm/W) 3000K - Ra90: 505lm (115lm/W) 4000K - Ra90: 542lm (123lm/W)
Luminous Flux System	2700K - Ra90: 378lm (86lm/W) 3000K - Ra90: 408lm (93lm/W) 4000K - Ra90: 438lm (100lm/W)
LED Power	4.4W (excl. driver)
System Power	5.0W (incl. driver)
Current	500mA
Forward voltage	8.9V (typ.)

 52x135mm (+4/-0)

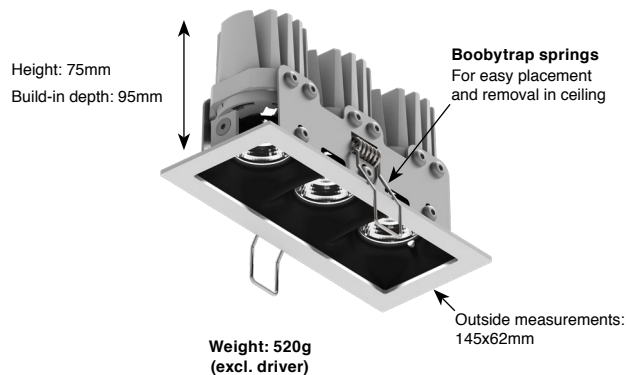

Driver:
- Included in article number and included in price
- External/Remote installation

Data sheets and wiring guide: see website
Driver information: see p.294-295

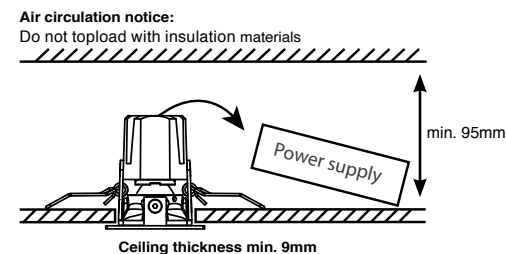



Vesto 350

Triple

PRICES INCL. DRIVERS

Non dim 350mA (Driver 493.24.15 incl.)

(3x) 2700K - Ra90 - 3.4W - 346lm	1068.AA.24.927.XX
(3x) 3000K - Ra90 - 3.4W - 374lm	1068.AA.24.930.XX
(3x) 4000K - Ra90 - 3.4W - 401lm	1068.AA.24.940.XX

1-10V dim & Push dim 350mA (Driver 490.25.20 incl.)

(3x) 2700K - Ra90 - 3.4W - 346lm	1068.AA.25.927.XX
(3x) 3000K - Ra90 - 3.4W - 374lm	1068.AA.25.930.XX
(3x) 4000K - Ra90 - 3.4W - 401lm	1068.AA.25.940.XX

DALI dim 350mA (Driver 490.26.20 incl.)

(3x) 2700K - Ra90 - 3.4W - 346lm	1068.AA.26.927.XX
(3x) 3000K - Ra90 - 3.4W - 374lm	1068.AA.26.930.XX
(3x) 4000K - Ra90 - 3.4W - 401lm	1068.AA.26.940.XX

Mains dim 350mA (Driver 495.27.20 incl.)

(3x) 2700K - Ra90 - 3.4W - 346lm	1068.AA.27.927.XX
(3x) 3000K - Ra90 - 3.4W - 374lm	1068.AA.27.930.XX
(3x) 4000K - Ra90 - 3.4W - 401lm	1068.AA.27.940.XX



Vesto 500 NEW!

Triple

PRICES INCL. DRIVERS

Non dim 500mA (Driver 493.24.22 incl.)

(3x) 2700K - Ra90 - 5.0W - 468lm	1098.AA.24.927.XX
(3x) 3000K - Ra90 - 5.0W - 505lm	1098.AA.24.930.XX
(3x) 4000K - Ra90 - 5.0W - 542lm	1098.AA.24.940.XX

1-10V dim & Push dim 500mA (Driver 490.25.20 incl.)

(3x) 2700K - Ra90 - 5.0W - 468lm	1098.AA.25.927.XX
(3x) 3000K - Ra90 - 5.0W - 505lm	1098.AA.25.930.XX
(3x) 4000K - Ra90 - 5.0W - 542lm	1098.AA.25.940.XX

DALI dim 500mA (Driver 490.26.20 incl.)

(3x) 2700K - Ra90 - 5.0W - 468lm	1098.AA.26.927.XX
(3x) 3000K - Ra90 - 5.0W - 505lm	1098.AA.26.930.XX
(3x) 4000K - Ra90 - 5.0W - 542lm	1098.AA.26.940.XX

Mains dim 500mA (Driver 493.27.20 incl.)

(3x) 2700K - Ra90 - 5.0W - 468lm	1098.AA.27.927.XX
(3x) 3000K - Ra90 - 5.0W - 505lm	1098.AA.27.930.XX
(3x) 4000K - Ra90 - 5.0W - 542lm	1098.AA.27.940.XX

36° Reflector: 0000.36.00.000.00

55° Reflector: 0000.55.00.000.00

Available colors: 0000.00.00.000.XX

Other RAL colors on request

01



White
Standard

18



Grey
Standard

03



Black
Standard

05



White + Black
Standard

16



Gold Matt

11



Black + Gold Matt

Vesto Quadro

350mA/500mA

Type	Downlight
Mounting	Recessed
Material	Aluminium
Adjustable	No
El. class / IP	Class III / IP20
El. class driver	Class II
Warranty:	see p.308

CREE CXB LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Luminous Flux LED	2700K - Ra90: 346lm (115lm/W) 3000K - Ra90: 374lm (125lm/W) 4000K - Ra90: 401lm (134lm/W)
Luminous Flux System	2700K - Ra90: 280lm (82lm/W) 3000K - Ra90: 302lm (88lm/W) 4000K - Ra90: 324lm (95lm/W)
LED Power	3.0W (excl. driver)
System Power	3.4W (incl. driver)
Current	350mA
Forward voltage	8.6V (typ.)

CREE CXB LED (500mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Luminous Flux LED	2700K - Ra90: 468lm (106lm/W) 3000K - Ra90: 505lm (115lm/W) 4000K - Ra90: 542lm (123lm/W)
Luminous Flux System	2700K - Ra90: 378lm (86lm/W) 3000K - Ra90: 408lm (93lm/W) 4000K - Ra90: 438lm (100lm/W)
LED Power	4.4W (excl. driver)
System Power	5.0W (incl. driver)
Current	500mA
Forward voltage	8.9V (typ.)



52x176mm (1/4"-0)





Driver:

- Included in article number and included in price
- External/Remote installation

Data sheets and wiring guide: see website
Driver information: see p.294-295

Air circulation notice:

Do not topload with insulation materials

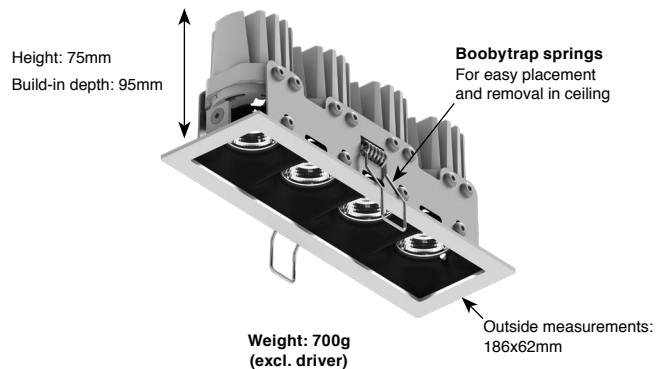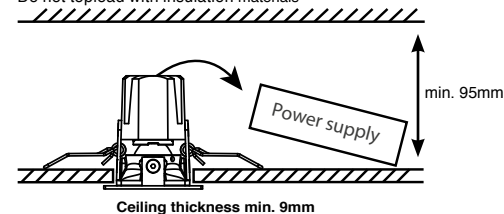



Vesto 350

Quadro

PRICES INCL. DRIVERS

Non dim 350mA (Driver 493.24.15 incl.)

(4x) 2700K - Ra90 - 3.4W - 346lm	1069.AA.24.927.XX
(4x) 3000K - Ra90 - 3.4W - 374lm	1069.AA.24.930.XX
(4x) 4000K - Ra90 - 3.4W - 401lm	1069.AA.24.940.XX

1-10V dim & Push dim 350mA (Driver 490.25.20 incl.)

(4x) 2700K - Ra90 - 3.4W - 346lm	1069.AA.25.927.XX
(4x) 3000K - Ra90 - 3.4W - 374lm	1069.AA.25.930.XX
(4x) 4000K - Ra90 - 3.4W - 401lm	1069.AA.25.940.XX

DALI dim 350mA (Driver 490.26.20 incl.)

(4x) 2700K - Ra90 - 3.4W - 346lm	1069.AA.26.927.XX
(4x) 3000K - Ra90 - 3.4W - 374lm	1069.AA.26.930.XX
(4x) 4000K - Ra90 - 3.4W - 401lm	1069.AA.26.940.XX

Mains dim 350mA (Driver 495.27.20 incl.)

(4x) 2700K - Ra90 - 3.4W - 346lm	1069.AA.27.927.XX
(4x) 3000K - Ra90 - 3.4W - 374lm	1069.AA.27.930.XX
(4x) 4000K - Ra90 - 3.4W - 401lm	1069.AA.27.940.XX

Vesto 500 NEW!

Quadro

PRICES INCL. DRIVERS

Non dim 500mA (Driver 493.24.22 incl.)

(4x) 2700K - Ra90 - 5.0W - 468lm	1099.AA.24.927.XX
(4x) 3000K - Ra90 - 5.0W - 505lm	1099.AA.24.930.XX
(4x) 4000K - Ra90 - 5.0W - 542lm	1099.AA.24.940.XX

1-10V dim & Push dim 500mA (Driver 490.25.20 incl.)

(4x) 2700K - Ra90 - 5.0W - 468lm	1099.AA.25.927.XX
(4x) 3000K - Ra90 - 5.0W - 505lm	1099.AA.25.930.XX
(4x) 4000K - Ra90 - 5.0W - 542lm	1099.AA.25.940.XX

DALI dim 500mA (Driver 490.26.20 incl.)

(4x) 2700K - Ra90 - 5.0W - 468lm	1099.AA.26.927.XX
(4x) 3000K - Ra90 - 5.0W - 505lm	1099.AA.26.930.XX
(4x) 4000K - Ra90 - 5.0W - 542lm	1099.AA.26.940.XX

Mains dim 500mA (Driver 493.27.20 incl.)

(4x) 2700K - Ra90 - 5.0W - 468lm	1099.AA.27.927.XX
(4x) 3000K - Ra90 - 5.0W - 505lm	1099.AA.27.930.XX
(4x) 4000K - Ra90 - 5.0W - 542lm	1099.AA.27.940.XX

36° Reflector: 0000.36.00.000.00
55° Reflector: 0000.55.00.000.00

Available colors: 0000.00.00.000.XX
Other RAL colors on request

01



White
Standard

18



Grey
Standard

03



Black
Standard

05



White + Black
Standard

16



Gold Matt

11



Black + Gold Matt



