


Trick

Design Dean Skira

iGuzzini

Last information update: May 2018



Wall/ceiling recessed, $\varnothing 45$ mm luminaire without an electronic transformer - Warm White - 360° radial effect

Product code

BU07

Technical description

Fixed, round, recessed luminaire designed for use with warm white LED lamps and a patented, 360° radial effect optic. Recessed luminaire consisting of a single die-cast aluminium body. The upper part is a heat sink which helps to dissipate the heat given off by the lamp. LED optics with a single methacrylate lens.

Installation

Recessed device with hot galvanised steel springs that make it easy-to-install in false ceilings between 1mm and 20mm thick.

Dimension (mm)

$\varnothing 45 \times 26$

Colour

White (01) | Chrome (10) | Grey (15)

Weight (Kg)

0.08

Mounting

wall surface|ceiling surface


Wiring

Product supplied with an outlet cable L=200mm. Electronic ballast to be ordered separately.

Notes

Compatible with the Master Pro DMX control system. The chrome-coloured version of Trick (10) can only be used internally.

Complies with EN60598-1 and pertinent regulations

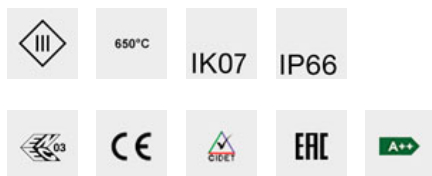

Product configuration: BU07

Product characteristics

Total lighting output [Lm]: 234

Total power [W]: 4

Luminous efficacy [Lm/W]: 58.5

Life Time: 50,000h - L80 - B10 (Ta 25°C)

Total luminous flux at or above an angle of 90° [Lm]: 130

Emergency luminous flux [Lm]: /

Voltage [V]: -

Number of optical assemblies: 1

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 45

Lamp code: LED

ZVEI Code: LED

Nominal power [W]: 4

Nominal luminous [Lm]: 520

Lamp maximum intensity [cd]: /

Beam angle [°]: /

Number of lamps for optical assembly: 1

Socket: /

Ballast losses [W]: 0


Colour temperature [K]: 3000

CRI: 80

Wavelength [Nm]: /

MacAdam Step: 3

Polar

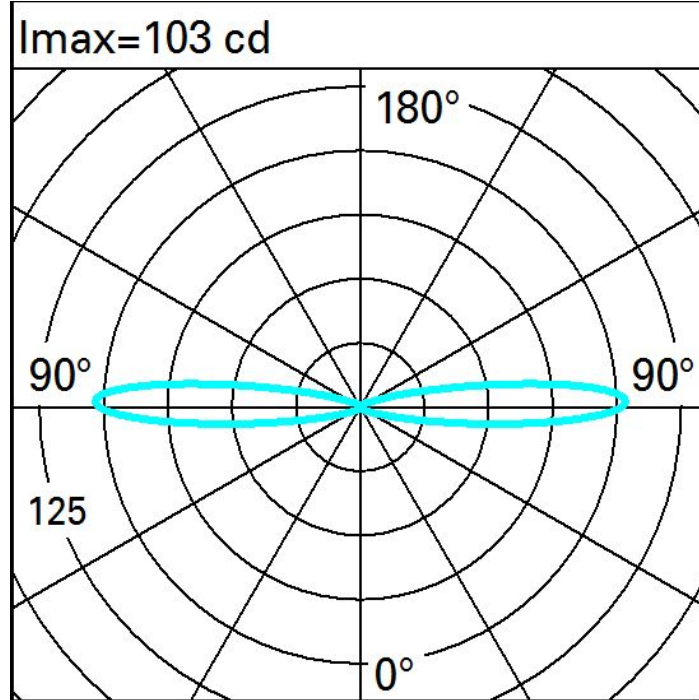

Isolux

