PRODUCT DATA SHEET

Nota Bene Ceiling 1200 WallWasher - T16 54W Dimmable - White



DESIGN BY :

Artemide

MATERIALS :

Painted Steel


DESCRIPTION:

Single ceiling lights using 1x54W or 2x54W T16 fluorescent light source. Two lighting options : dark light and wall washer. Steel body with a white or grey paint finish. Electronic control gear, with or without dimming (Dali-Switchdim). Lamps can be maintained without removing the luminaire. Complies with standard EN60598-1 and other specific standards.

Nota Bene ceiling dark light

Super pure aluminum dark light optics. Dark light emission is in compliance with EN12464-1 standard, with average luminance levels lower than the 1000 cd/m² limit for an observation angle of 65° or above with respect to the vertical axis. Light output ratio 71%. Emergency lighting as an optional extra.

Nota Bene ceiling wall washer

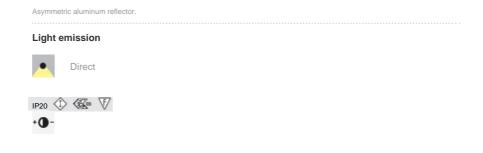

TECHNICAL DATA SHEET

Features

 Product name:
 Nota Bene Ceiling 1200

 WallWasher - T16 54W Dimmable

 White

 Article Code:
 M109221

 Colour:
 White

 Material:
 Painted Steel

 Series:
 Architectural

 Environment:
 Indoor

 Area contract:
 House

Direct

Dimensions

| | 70 | 160 |
|------|----|-----|
| 1170 | | 160 |
| 1270 | | |

OPTICS

Emission:

DIMENSIONS

| Length: | (cm) 127 |
|-----------------|----------|
| Width: | (cm) 16 |
| Height: | (cm) 5.4 |
| Cutout shape: | |
| Weight: | 4.2 |
| Glow Wire Test: | 850 ° |
| | |

LAMPS NOT INCLUDED

| Category: | FLUO |
|-------------------------|--------|
| Number: | 1 |
| Lbs: | T16 |
| Watt: | 54 |
| Socket: | G5 |
| Туре: | FDH-54 |
| Luminous Flux (Im): | 4450 |
| Colour Rendering: | 85 |
| Colour temperature (K): | 3000 |
| Duration (h): | 20000 |
| | |

IP20 🛈 🌆 🕅

ELECTRICAL

Starter:

LAMP

+0

Voltage:

Electronic Dimmable DALI Integrated 220V-240V

Artemide

ACCESSORIES



INTERACTIVE-DALI kit Ø86mm, white, recessed. Can be connected to a max. 11 DALI dimmable units. Is operated through INTERACTIVE-DALI remote control or external push button. M074030



INTERACTIVE-DALI remote control. M104900