BEGA 31 224

Wall luminaire

Project · Reference number

Date

Product data sheet

Application

Wall luminaire made of copper and opal glass. For many lighting tasks on or in buildings. Ideal for places where a soft and uniform light distribution is required.


Product description

Luminaire made of copper, brass and stainless steel Opal glass with screw neck Silicone gasket Mounting plate with 2 fixing holes ø 4.5 mm · 40 mm spacing 1 cable entry for mains supply cable up to Ø 10,5 mm max. $3 \times 1,5^{\Box}$ Connection terminal 2.5 Earth conductor connection Lampholder E 14 Safety class I Protection class IP 44 Protected against granular foreign bodies > 1 mm and splash water Impact strength IK06 Protection against mechanical impacts < 1 joule **₹10** ♠ – Safety mark C € – Conformity mark Weight: 1.1 kg

Copper

The luminaire parts made of solid copper are delivered with the metal's natural surface colour. Time and weather factors create the natural patina characteristic for copper.



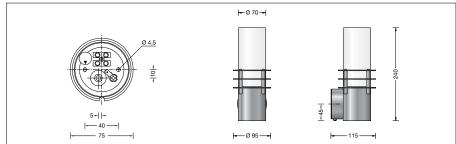

Lamp

Luminaire with lampholder E 14 Lamp output max. 40 W

For this luminaire we recommend the following BEGA LED lamps:

13 552 LED 4 W · 470 lm · frosted · 2700 K **13 594** LED 4 W · 470 lm · frosted · 3000 K

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.