

**BEGA****33 632**

Ceiling and wall luminaire



Project · Reference number

Date

## Product data sheet

### Application

Ceiling and wall luminaire made of aluminium and hand-blown satin matt three-ply opal glass. For a variety of interior and exterior lighting applications.

Ideal for places where a soft and uniform lighting distribution is required.

### Product description

Luminaire made of aluminium and stainless steel  
Opal glass, satin matt, with screw neck

Silicone gasket

Reflector made of pure anodised aluminium

2 mounting holes  $\varnothing$  5.5 mm

Distance apart 240 mm

2 cable entries for through-wiring of mains

supply cable  $\varnothing$  7-10.5 mm

Connection terminal 2.5<sup>2</sup>

Earth conductor connection

Lampholder E 27

Safety class I

Protection class IP 64

Dust-tight and protection against splash water

Impact strength IK03

Protection against mechanical

impacts < 0.35 joule

– Safety mark

**CE** – Conformity mark

Weight: 2.4 kg

### Lamps

Luminaire with lampholder E 27

Lamp output max. 2 × 60 W


For this luminaire we recommend the following BEGA LED lamps:

**13510** LED 7 W · 805 lm · 2700 K

**13548** LED 7 W · 805 lm · 2700 K  
dimmable

**13512** LED 8 W · 1055 lm · 2700 K

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

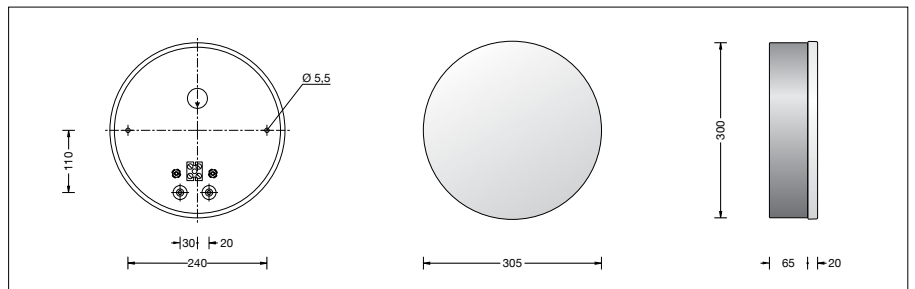

### Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page [www.bega.com](http://www.bega.com).

### Article No. 33 632

Colour graphite or silver  
graphite – article number  
silver – article number + **A**

### Light distribution

