BEGA 34 780

Wall luminaire for indoor use



Project · Reference number

Date

Product data sheet


Application

Wall luminaire · indoor luminaire made of handblown opal glass, satin matt and metal housing, for all lighting tasks in interior applications. They are ideal for places where a soft and uniform lighting distribution is required. Luminaire with a high protection class.

Product description

Metal housing, finish white enamel Hand-blown opal glass, satin matt 2 fixing holes ø 6 mm 90 mm spacing 1 cable entry for mains supply cable up to \emptyset 10.5 mm max. 3 x 1.5 Lampholder terminals 2.5 Earth conductor terminal Lampholder E 27 Safety class I Protection class IP 44 Protected against granular foreign bodies > 1 mm and splash water ■ Safety mark C € – Conformity mark Weight: 1.5 kg



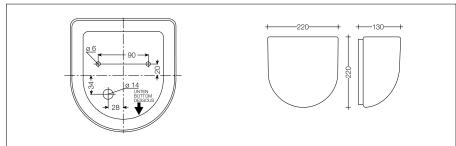

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Lamp

Luminaire with lampholder E 27 Lamp wattage max. 100 W

High voltage tungsten halogen lamp QA 55 \cdot E 27

Osram: Hal Pro CL A 77 W 1320 lm Philips: Halog. Classic 70 W A55 1CT 1200 lm Sylvania: CLECO A55 230V 70W 1190 lm

Please note the lamp manufacturers' operating instructions.