BEGA

Ceiling and wall luminaire for indoor use

Project · Reference number

Product data sheet

Application

Ceiling and wall luminaire • indoor luminaire made of hand-blown opal glass, satin matt and metal housing, for all lighting tasks. They are ideal for places where a soft and uniform lighting distribution is required. Luminaire with a high protection class.

Product description

Metal housing, finish white enamel Hand-blown opal glass, satin matt, with sliding-bolt closure 2 mounting holes ø 5.5 mm Distance apart 280 mm 2 cable entries for through-wiring for mains cable up to ø 10.5 mm max. 3 × 1.5[□] Connection terminal 2.5 Earth conductor connection Lampholder E 27 Safety class I Protection class IP 44 Protected against granular foreign bodies > 1 mm and splash water Impact strength IK03 Protection against mechanical impacts < 0.35 joule 🐇 – Safety mark \mathbf{CE} – Conformity mark Weight: 3.6 kg

Lamps

Luminaire with lampholder E 27 Lamp output max. $3 \times 60 \text{ W}$


For this luminaire we recommend the following BEGA LED lamps:

13510 LED 7 W · 805 lm · 2700 K **13548** LED 7 W · 805 lm · 2700 K dimmable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

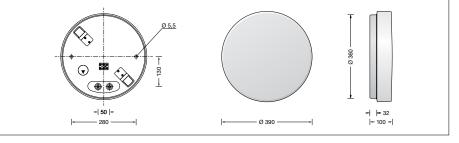

Accessory · Trim rings

For this luminaire metal trim rings in 3 surfaces are optional available.

Trim rings are accessories and must be ordered separately.

Item	Part. No
Enamel white	13 082
Stainless steel	13 083
Chrome	13 084

Date

₹10 @ IP 44