

BEGA**50 346.3**

Ceiling and wall luminaire for indoor use

IP 44

Project · Reference number

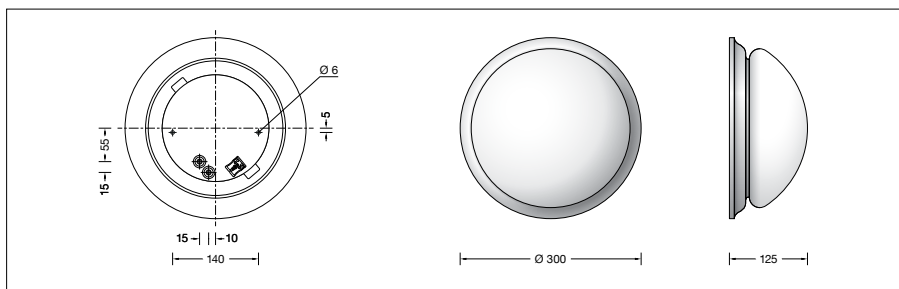
Date

Product data sheet**Application**

Ceiling and wall luminaire · indoor luminaire made of hand-blown opal glass and metal housing, for all lighting tasks. They are ideal for places where a soft and uniform lighting distribution is required.

Product description

Metal housing,
finish white enamel
Chrome-plated ornamental ring
Hand-blown opal glass, with sliding-bolt closure
2 fixing holes \varnothing 6 mm
140 mm spacing
Connecting terminal 2.5[□]
Earth conductor connection
LED-Module for mains voltage
220-230 V \sim 50/60 Hz
Safety class I
Protection class IP 44
Protected against granular foreign bodies
> 1 mm and splash water
CE – Conformity mark
Weight: 0.85 kg

**Lamp**

Luminaire connected wattage	24 W
Rated temperature	$t_a = 25 \text{ }^\circ\text{C}$
Service life criteria	50 000 h/L ₇₀
Module designation	2x LED-0607/830
Colour temperature	3000 K
Colour rendering index	$R_a > 80$
Module luminous flux	2160 lm
Luminaire luminous flux	1611 lm
Luminaire luminous efficiency	67,1 lm/W

Article No. 50 346.3

Finish options
 • Enamel, white
 • Stainless steel
 • Chrome
 • Brass

Code number **.1**
 Code number **.2**
 Code number **.3**
 Code number **.4**