

BEGA**50 625.5**

Pendant luminaire for indoor use

Project · Reference number

Date

Product data sheet**Application**LED pendant luminaire downlight · indoor
luminaire with narrow beam light distribution.**Product description**

Pendant luminaire downlight »GENIUS«
 Die-cast aluminium housing,
 Velvet black enamel finish
 Reflector surface made of pure aluminium
 Optical silicone lens
 Trim ring · Chrome finish
 Safety glass
 Black flex suspension $5 \times 0,75$ □
 with 1 steel messenger wire
 Overall length of luminaire approx. 3000 mm
 Connection terminal 2.5 □
 Earth conductor connection
 Connecting terminal for digital control
 LED power supply unit
 220-240 V \sim 0/50-60 Hz
 DALI controllable
 A basic isolation exists between power cable
 and control line
 Safety class I
 CE – Conformity mark
 Weight: 3.1 kg

Inrush current

Inrush current: 5 A / 50 μ s
 Maximum number of luminaires of this
 type per miniature circuit breaker:
 B10A: 31 luminaires
 B16A: 50 luminaires
 C10A: 52 luminaires
 C16A: 85 luminaires

Lamp

Module connected wattage 17 W
 Luminaire connected wattage 20 W
 Rated temperature $t_a = 25$ °C
 Ambient temperature $t_{a \max} = 45$ °C

50 625.5 K3

Module designation LED-0785/930
 Colour temperature 3000 K
 Colour rendering index CRI > 90
 Module luminous flux 2655 lm
 Luminaire luminous flux 2204 lm
 Luminaire luminous efficiency 110,2 lm/W

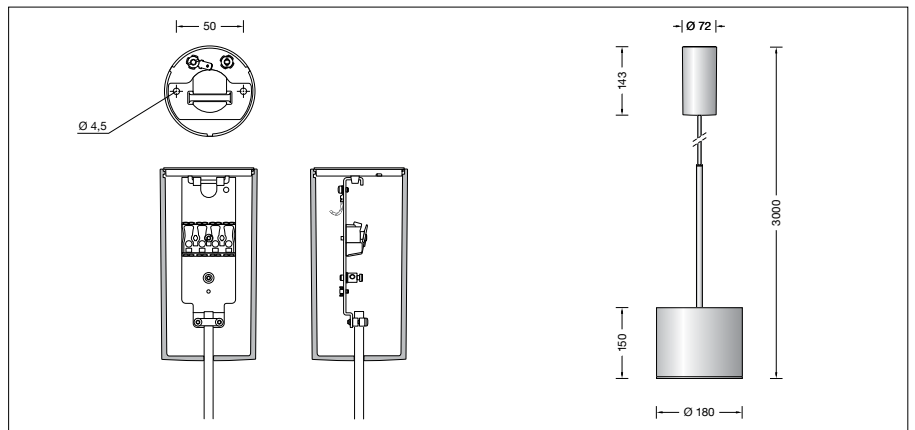
50 625.5 K4

Module designation LED-0785/940
 Colour temperature 4000 K
 Colour rendering index CRI > 90
 Module luminous flux 2695 lm
 Luminaire luminous flux 2237 lm
 Luminaire luminous efficiency 111,8 lm/W

Service life of the LED

Ambient temperature $t_a = 25$ °C
 – at 390,000h: L70B50

max. ambient temperature $t_a = 45$ °C
 – at 300,000h: L70B50

**Lighting technology**

Half beam angle 19°
 Luminaire data for the light planning program
 DIALux for outdoor lighting, street lighting and
 interior lighting as well as luminaire data in
 EULUMDAT and IES format are available on our
 website www.bega.com.

Article No. 50 625.5

LED colour temperature optionally 3000 K
 or 4000 K
 3000 K – Article number + **K3**
 4000 K – Article number + **K4**

Optional finishes

- Velvet white enamel finish Code number **.1**
- Velvet black enamel finish Code number **.5**