

BEGA**89 009**

Ceiling and wall luminaire for indoor use



Project · Reference number



Date



Product data sheet

Application

Ceiling and wall luminaire · indoor luminaire made of hand-blown opal glass, satin matt and metal housing, for all lighting tasks. They are ideal for places where a soft and uniform lighting distribution is required. Luminaire with a high protection class.

Product description

Luminaire housing made of Aluminium, finish white enamel
 Hand-blown opal glass, satin matt, with sliding-bolt closure
 2 fixing holes \varnothing 4.5 mm
 80 mm spacing
 1 cable entry for mains supply cable up to \varnothing 10.5 mm max. $3 \times 1.5^{\square}$
 Lampholder terminals 2.5^{\square}
 Earth conductor terminal
 Lampholder E 14
 Safety class I
 Protection class IP 44
 Protected against granular foreign bodies > 1 mm and splash water
 – Safety mark
 – Conformity mark
 Weight: 0.8 kg

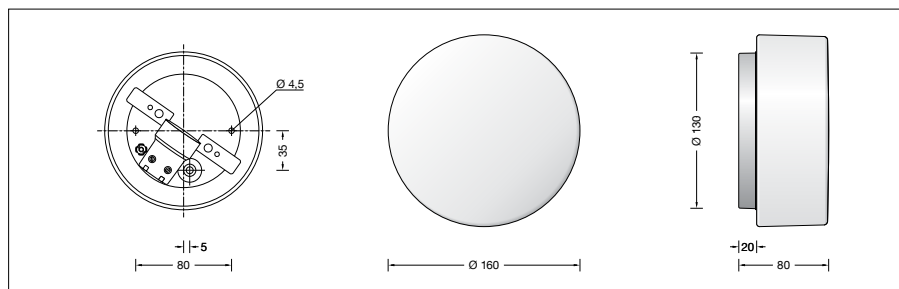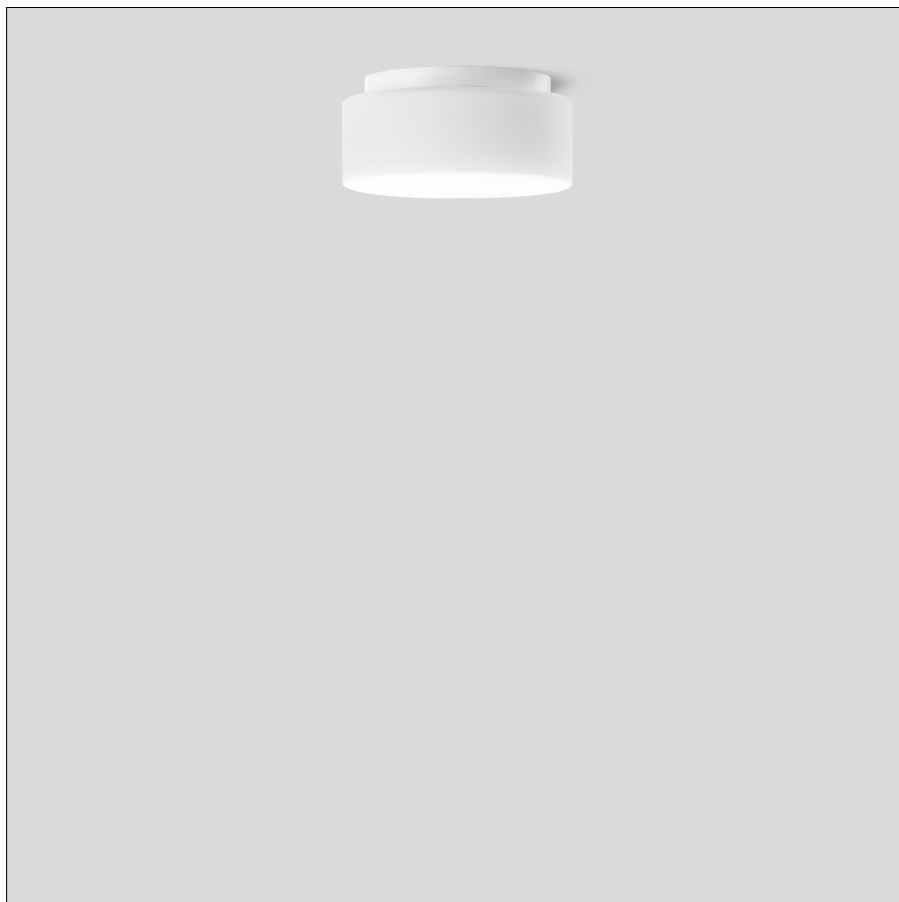

Lamp

Luminaire with lampholder E 14
 Lamp wattage max. 1 x 40 W

High voltage tungsten halogen lamp QD 45 · E 14

Osram: Eco Pro Classic 30 W 405 lm
 Philips: Eco Classic 28 W P45 370 lm

Please note the lamp manufacturers' operating instructions.