



## TECHNICAL DATA SHEET ART. C.8230W - MICROGHOST SQUARE

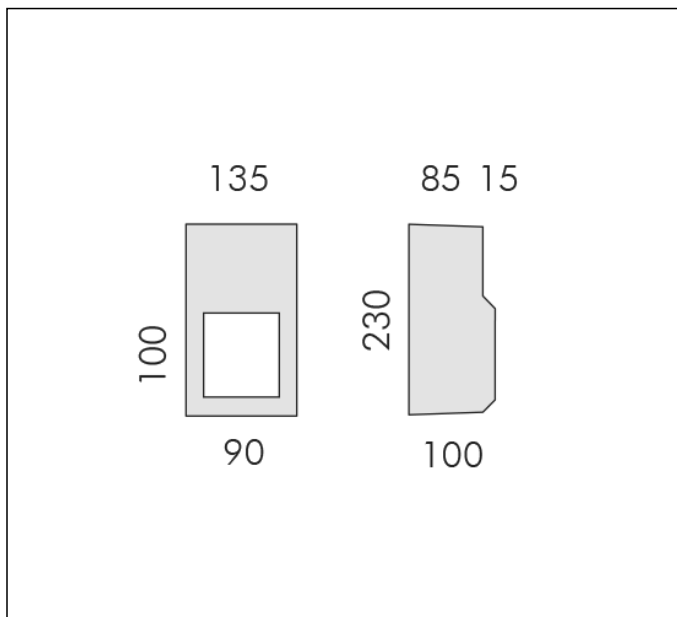

MODULES LED 3000K 24V 320lm CRI 80  
 Rated luminaire luminous flux: 240lm  
 Rated input power: 4W  
 Luminaire efficacy: 60lm/W  
 Without transformer

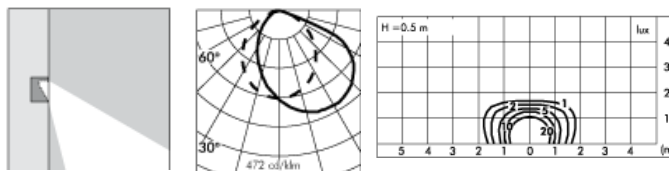

### PRODUCT TYPE

Wall mounted luminaire. IP rating IP 65

### MATERIAL CHARACTERISTICS

Ghost for breeze block application is easily applied in walls made of perforated bricks or cement conglomerate. The product is designed to be wall mounted and completely integrated with the architecture of which it will take over the finish. The cavity is pre-finished and ready for painting. The procedure is as follows: 1. Plan the positioning of the corrugated tube for electrification; 2. Make a niche to insert the Ghost polystyrene block, paying attention to its aligning; 3. Lay the fixative grid that connects the cement conglomerate wall to the Ghost's polystyrene lock; 4. Enclose the product in the wall, cut the grid at the Ghost's cavity and finish off; 5. Once the work is finished, the luminaire may be installed. Mechanical resistance IK 06

### LIGHTING PERFORMANCE

Toughened glass diffuser. LOR --

### WIRING

Supplied with a pre-wired 3m H05RN-F cable. Isolation: CLASS III . Available colours: Cast cement. Weight: Kg Glow Wire test: --

L.E.D circuit included.

GHOST PATENT PENDING, REGISTERED DESIGN

This luminaire contains built-in LED modules with energy class: A, A+, A++. In case of damage or malfunction please contact the manufacturer to receive additional instructions on how to replace and relative spare parts to order. The LED modules cannot be handled in the luminaire by the end user (Regulation UE 874/2012).

LED circuit boards are engineered accordingly to actual Lumen Maintenance regulation (LM80) and Technical Memorandum (TM21) where uniformity and quality of light is 50.000 hours referred to L70 B20 Ta 25°C.

Lifecycle refers to LED circuit boards only, all others components of the luminaire are excluded.

### EMERGENCY VERSIONS

The fittings operates both on AC ( 50/60Hz ) and DC ( 0Hz ) voltage.

## TECHNICAL DATA SHEET ART. C.8230W - MICROGHOST SQUARE ACCESSORIES



**S.3407**  
**REMOTE POWER SUPPLY 100W IP66**  
for monochromatic LED 100W 240V/24V DC.  
IP66  
The Total power of all connected luminaires may not be higher than the power of the driver.  
Dimensions 210mm x70mm x40mm



**S.3402**  
**REMOTE POWER SUPPLY DIMMABLE 40W IP67**  
Dimmable 1-10V for monochromatic LED  
40W 240V/24V DC  
IP67  
The Total power of all connected luminaires may not be higher than the power of the driver.  
Dimensions 150x53x35mm