


AIXLIGHT KARDATRACK MR16/2

silvergrey, max. 50W, incl. 3-circuit adaptor



Article number	154502
Type of lamp	Conventional lamp
Lamp	MR16 12V max. 50W
Lampholder / Socket	GU5,3
Number of light sources	2
Lamp included	No
Tilt range	85 Degree
Rotation range	350 Degree
Length	35 cm
Width	13 cm
Height	15 cm
Net weight	1.081 kg
Gross weight	5.5 kg
Voltage	230 Volt
Max. wattage	100 Watt
Protection class	I
Material	aluminium
Colour	silvergrey
Way of mounting	track system mounting
Remark 1	Electronic transformer incorporated
Remark 2	The mounted adaptor is suitable for all conventional 3 circuit tracks
Remark 3	Energy labels in your language are available in the Service Area sub point Download
Suitable for lamps from EEC	C
Suitable for lamps up to EEC	A+
Light distribution type 1	direct
Light distribution type 3	rotationally symmetric

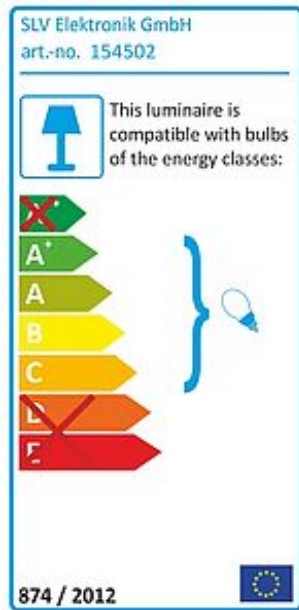

Double-headed, low-voltage spotlight KARDATRACK MR16/2 with suitable adaptor for the 3-circuit high-voltage track system. Due to the in-frame position of the two lampholders they remain individually adjustable. The dimmable electronic transformer is fitted in the center part of the frame. The incorporated GU5.3 lampholders make KARDATRACK MR16/2 ready for halogen and LED lamps with a maximum diameter of 5cm. This luminaire is compatible with bulbs of the energy classes: C - A+