



T5 GRILL QRB pendant luminaire

square, silvergrey, 4x T5 24W and 3x QRB111 50W max.

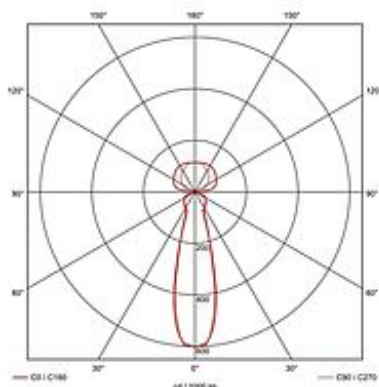

Article number	157112
Catalogue	BIG WHITE 2015, Page 101
Type of lamp	Conventional lamp
Lamp	T5 fluorescent bulb 24W / QRB 111 12V max. 50W
Lampholder / Socket	G5 & G53
Number of light sources	7
Lamp included	No
Length	60.5 cm
Width	60.5 cm
Height	6.5 cm
Pendant length	150 cm
Net weight	6.89 kg
Gross weight	7.783 kg
Voltage	230 Volt
Max. wattage	246 Watt
Protection class	I
Material	aluminium / acrylic
Colour	silvergrey
Way of mounting	ceiling mounting pendulum
Remark 1	The QRB111 and T5 bulbs can be switched separately
Remark 2	Electronic ballast and transformer incorporated
Remark 3	The QRB lamp head is rotatable and swivelable
Remark 4	Energy labels in your language are available in the Service Area sub point Download
Energy class ballast	A2
Suitable for lamps from EEC	A
Suitable for lamps up to EEC	A
Suitable for lamps from EEC	D
Suitable for lamps up to EEC	A+

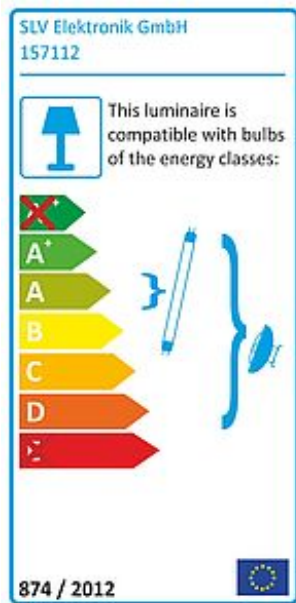

Light distribution type 1 direct-indirect

Light distribution type 2 direct

Light distribution type 3 axisymmetric

Light distribution type 4 rotationally symmetric

The T5 GRILL QRB pendant luminaire is a professional fitting for surface mounting. Behind the frosted acrylic glass, which is mounted on a rectangular, silvergrey painted frame, there are four G5 lampholders for T5 fluorescent tubes, providing 24W each. Additionally embedded in the acrylic plate there are G53 lamp holders, ready for three low-voltage halogen lamps with QRB111 socket. Besides the adjustability of the QRB lampholders, both light sources can be controlled apart from each other. Thanks to the already incorporated, electronic ballast and transformer, T5 GRILL QRB is ready for direct connection to 230V mains supply. This luminaire is compatible with bulbs of the energy classes: A - A / D - A+