
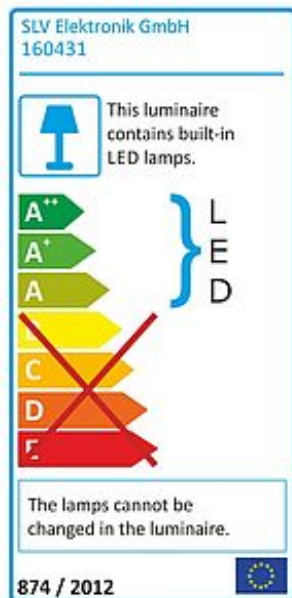



LED downlight 14/4

round, white, 8W, SMD LED, 4000K

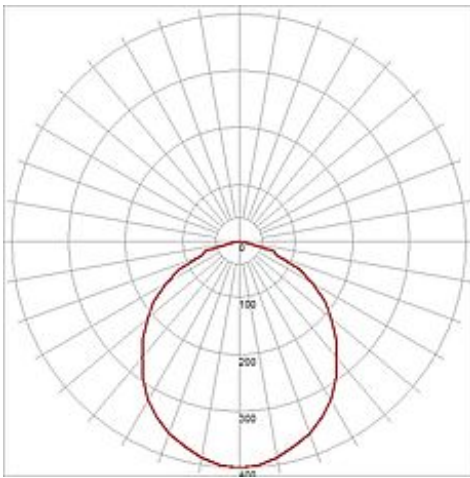

| | |
|------------------------------|---|
| Article number | 160431 |
| Catalogue | BIG WHITE 2015, Page 421 |
| Type of lamp | LED lamp |
| Lamp | SMD LED |
| Number of light sources | 14 |
| Lamp included | Yes |
| Installation diameter | 13.5 cm |
| Installation depth | 13 cm |
| Height | 12.3 cm |
| Diameter | 14.8 cm |
| Net weight | 0.35 kg |
| Gross weight | 0.336 kg |
| Voltage | 230 Volt |
| Max. wattage | 8 Watt |
| Protection class | II |
| Beam angle | 120 Degree |
| Material | aluminium / plastic |
| Colour | white |
| Way of mounting | recessed ceiling mounting |
| Remark 1 | For recessed installation in ceilings with a maximum thickness of 30 mm |
| Remark 2 | Energy labels in your language are available in the Service Area sub point Download |
| Average lifespan | 20000 Hours |
| Colour temperature | 4000 Kelvin |
| Colour rendering index | >80 |
| Luminous flux | 550 lm |
| Suitable for lamps from EEC | A |
| Suitable for lamps up to EEC | A++ |
| Light distribution type 1 | direct |

Light distribution rotationally symmetric
 type 3

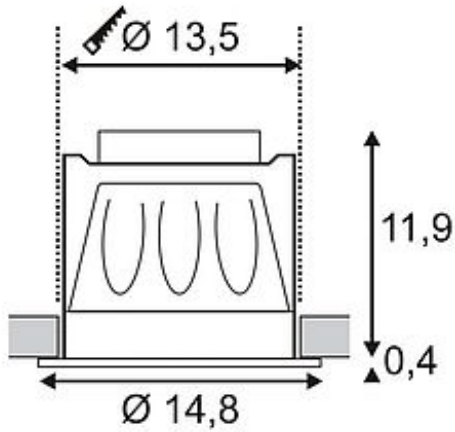

The LED DOWNLIGHT 14/4 is equipped with a SMD LED with an output of 8W. The luminaire is made from aluminum and is available in either pure or warmwhite light colour. The housing is painted white. Thanks to the already incorporated LED driver, the LED DOWNLIGHT 14/4 is ready for direct connection to 230V mains supply. This luminaire contains built-in LED lamps. EEK: A - A++. The lamps cannot be changed in the luminaire.