


DASAR HIT-T 150W recessed ground fitting

square, stainl. steel 316, G12, max.

Article number	229284
Catalogue	BIG WHITE 2015, Page 679
Type of lamp	Conventional lamp
Lamp	HQI-T / CDM-T 150W
Lampholder / Socket	G12
Number of light sources	1
Lamp included	No
Installation diameter	29 cm
Installation depth	40 cm
Tilt range	25 Degree
Length	27 cm
Width	27 cm
Net weight	9.244 kg
Gross weight	8.767 kg
Voltage	230 Volt
Max. wattage	150 Watt
Protection class	I
Material	aluminium / stainless steel 316
Colour	stainless steel
Way of mounting	recessed ground mounting
Remark 1	Maximum cable diameter 12 mm
Remark 2	Weight capacity 2 tons. Through-wiring is possible
Remark 3	Conventional ballast incorporated
Remark 4	Energy labels in your language are available in the Service Area sub point Download
Energy class ballast	A3
Suitable for lamps from EEC	A
Suitable for lamps up to EEC	A+
Light distribution type 1	direct

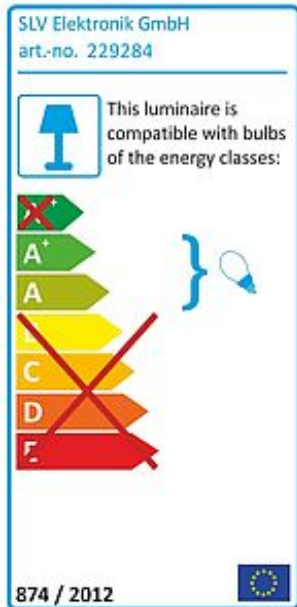

Light distribution asymmetric
type 3

The walkable recessed ground luminaire with a round stainless steel cover and partially satined glass is equipped with an adjustable G12 lampholder and a suitable ballast making it compatible with discharge lamps. Rated IP67, DASAR is suitable for outdoor use. The electrical connection is made directly to 230V mains supply. For simplified mounting, a suitable installation housing is included offering through-wiring possibility. This luminaire is compatible with bulbs of the energy classes: A - A+