

Last information update: May 2018

**Outdoor ceiling-mounted luminaire - neutral white LED - with integrated electronic ballast Vin=120-240V ac - Flood optic****Product code**

BI15

**Technical description**

Direct light outdoor ceiling-mounted luminaire, designed to use monochrome neutral white LED lamps, with fixed Flood optic. Ceiling-mounted using the special base. Consists of an optical assembly, base and glass-holding frame. The optical assembly, ceiling base and frame are made of die-cast aluminium alloy coated with liquid acrylic paint with a high level of resistance to weather and UV rays. The 4 mm thick transparent, tempered sodium - calcium glass is joined to the frame with silicone. The internal silicone seals guarantee watertightness. Tool-free quick-coupling closing system between frame, optical assembly and ceiling base. Complete with circuit having monochrome neutral white LEDs and an optic with 99.93% polished super-pure aluminium reflector. Flood (F) emission. A number of accessories are available: refractor for elliptical distribution, prismatic diffusing glass and coloured filters. All external screws used are made of A2 stainless steel. The luminaire technical characteristics conform to EN60598-1 standards and particular requirements.

**Installation**

Ceiling-mounted with down-light emission. Secure using screw anchors for concrete, cement and solid brick.

**Dimension (mm)**

Ø109x208

**Colour**

Grey (15)

**Weight (Kg)**

1.54

**Mounting**

ceiling surface

**Wiring**

Control gear complete with electronic ballast 120-240V ac 50/60Hz. Polyamide PG11 double cable gland for pass-through wiring, suitable for power cables ø 6.5-11 mm. Three-pin terminal block set up for pass-through earth wire. Cables with quick-coupling terminals connect the terminal block and the control gear.

**Notes**

Product complete with LED lamp

Complies with EN60598-1 and pertinent regulations

**Product configuration: BI15****Product characteristics**

Total lighting output [Lm]: 1260.9  
 Total power [W]: 16.8  
 Luminous efficacy [Lm/W]: 75.1  
 Life Time: 100,000h - L80 - B10 (Ta 25°C)  
 Number of optical assemblies: 1


Total luminous flux at or above an angle of 90° [Lm]: 0  
 Emergency luminous flux [Lm]: /  
 Voltage [V]: -  
 Ambient temperature range: from -20°C to +35°C.

**Optical assembly Characteristics Type 1**


Light Output Ratio (L.O.R.) [%]: 72  
 Lamp code: LED  
 ZVEI Code: LED  
 Nominal power [W]: 12  
 Nominal luminous [Lm]: 1750  
 Lamp maximum intensity [cd]: /  
 Beam angle [°]: 40°

Number of lamps for optical assembly: 1  
 Socket: /  
 Ballast losses [W]: 4.8  
 Colour temperature [K]: 4000  
 CRI: 80  
 Wavelength [Nm]: /  
 MacAdam Step: 2

**Polar**

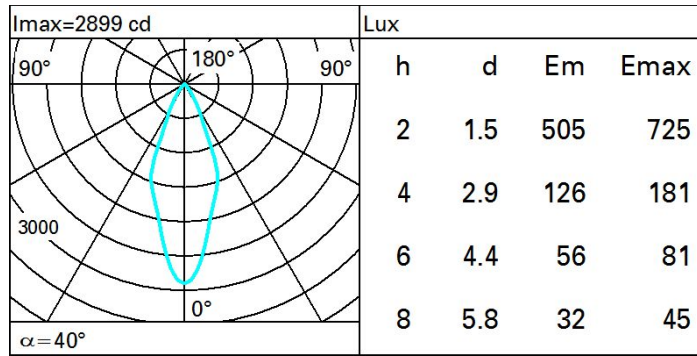

**Isolux**

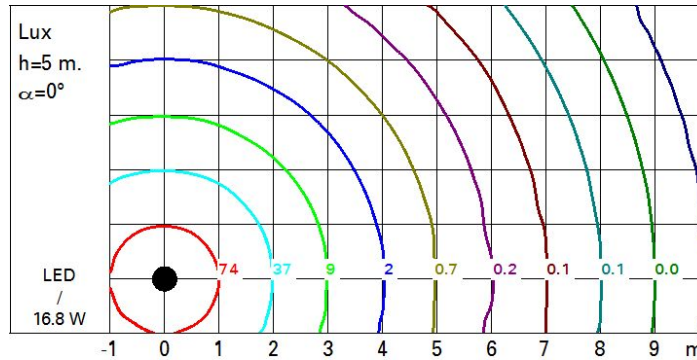

**UGR diagram**

Corrected UGR values (at 1750 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling	cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	14.3	15.0	14.6	15.2	15.4	14.3	15.0	14.6	15.2	15.4
	3H	14.2	14.8	14.5	15.1	15.3	14.2	14.8	14.5	15.1	15.3
	4H	14.2	14.7	14.5	15.0	15.3	14.1	14.7	14.5	15.0	15.3
	6H	14.1	14.6	14.5	14.9	15.2	14.1	14.6	14.4	14.9	15.2
	8H	14.1	14.6	14.4	14.9	15.2	14.0	14.5	14.4	14.8	15.2
	12H	14.0	14.5	14.4	14.8	15.2	14.0	14.5	14.4	14.8	15.1
4H	2H	14.1	14.7	14.5	15.0	15.3	14.2	14.7	14.5	15.0	15.3
	3H	14.1	14.5	14.4	14.9	15.2	14.1	14.5	14.5	14.9	15.2
	4H	14.0	14.4	14.4	14.8	15.2	14.0	14.4	14.4	14.8	15.2
	6H	13.9	14.3	14.4	14.7	15.1	13.9	14.3	14.4	14.7	15.1
	8H	13.9	14.2	14.3	14.6	15.1	13.9	14.2	14.3	14.6	15.1
	12H	13.9	14.1	14.3	14.6	15.0	13.8	14.1	14.3	14.6	15.0
8H	4H	13.9	14.2	14.3	14.6	15.1	13.9	14.2	14.3	14.6	15.1
	6H	13.8	14.1	14.3	14.5	15.0	13.8	14.1	14.3	14.5	15.0
	8H	13.8	14.0	14.3	14.5	15.0	13.8	14.0	14.3	14.5	15.0
	12H	13.7	13.9	14.2	14.4	14.9	13.7	13.9	14.2	14.4	14.9
12H	4H	13.8	14.1	14.3	14.6	15.0	13.9	14.1	14.3	14.6	15.0
	6H	13.8	14.0	14.3	14.5	15.0	13.8	14.0	14.3	14.5	15.0
	8H	13.7	13.9	14.2	14.4	14.9	13.7	13.9	14.2	14.4	14.9
Variations with the observer position at spacing:											
S =		1.0H					4.4 / -7.1				
		1.5H					7.1 / -9.0				
		2.0H					9.1 / -10.3				