


Last information update: May 2018

**Spotlight with base - Neutral White Led - Class III - Spot optic****Product code**

Q699

**Technical description**

Spotlight designed to use LED lamps and a Spot optic. The optical assembly and base is made of EN1706AC 46100LF aluminium alloy and subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The following painting stage consists of a primer and a liquid acrylic paint, cured at 150°C, with a high level of weather and UV ray resistance. 5 mm thick tempered sodium-calcium closing glass. Double adjustability allows a 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. Mechanical aiming locks for rotation on both the vertical axis and horizontal plane. Complete with a monochrome LED circuit and an Opti Beam Reflector optic system. The product is supplied with a PG13.5 cable gland and black rubber outlet cable complete with anti-transpiration device. Black rubber outlet cable complete with anti-transpiration device. Electronic ballast to be ordered separately. Option of using optic accessories assembled via an accessory holder frame. All external screws used are made of A2 stainless steel.

**Installation**

Floor, wall, ceiling or ground-installed via a stake.

**Dimension (mm)**

Ø83

**Colour**

White (01) | Grey (15)

**Weight (Kg)**

1.3


**Mounting**

wall surface|ground spike

**Wiring**

The product is supplied with a black rubber outlet cable complete with anti-transpiration device L=1000mm.

Complies with EN60598-1 and pertinent regulations

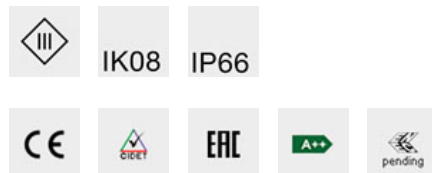**Product configuration: Q699****Product characteristics**

Total lighting output [Lm]: 1277  
 Total power [W]: 12  
 Luminous efficacy [Lm/W]: 106.4  
 Life Time: 100,000h - L80 - B10 (Ta 25°C)  
 Ambient temperature range: from -20°C to +35°C. (\*)

Total luminous flux at or above an angle of 90° [Lm]: 0  
 Emergency luminous flux [Lm]: /  
 Voltage [V]: -  
 Life Time: 100,000h - L80 - B10 (Ta 40°C)  
 Number of optical assemblies: 1


\* Preliminary data

**Optical assembly Characteristics Type 1**


Light Output Ratio (L.O.R.) [%]: 69  
 Lamp code: LED  
 ZVEI Code: LED  
 Nominal power [W]: 12  
 Nominal luminous [Lm]: 1850  
 Lamp maximum intensity [cd]: /  
 Beam angle [°]: 16°

Number of lamps for optical assembly: 1  
 Socket: /  
 Ballast losses [W]: 0  
 Colour temperature [K]: 4000  
 CRI: 80  
 Wavelength [Nm]: /  
 MacAdam Step: 2

# Polar

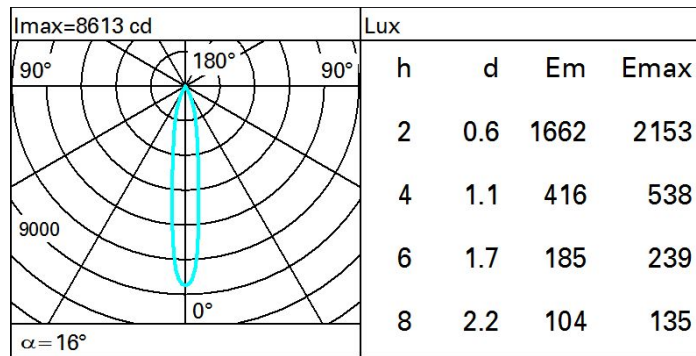

# Isolux

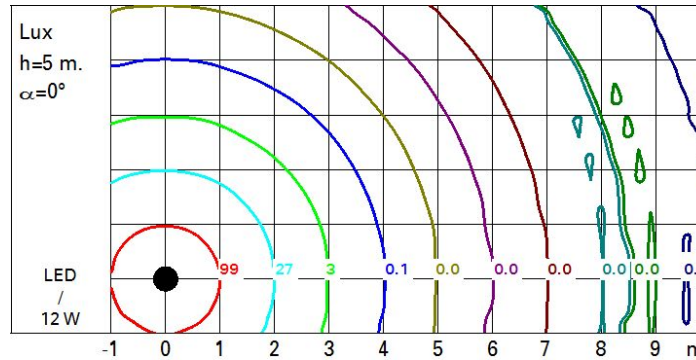

# UGR diagram

Corrected UGR values (at 1850 lm bare lamp luminous flux)											
Riflect.: ceil/cav walls work pl. Room dim x y		0.70 0.50 0.20	0.70 0.30 0.20	0.50 0.50 0.20	0.50 0.30 0.20	0.30 0.30 0.20	0.70 0.50 0.20	0.70 0.30 0.20	0.50 0.50 0.20	0.50 0.30 0.20	0.30 0.30 0.20
viewed crosswise						viewed endwise					
2H	2H	1.2	3.4	1.6	3.7	4.0	1.2	3.4	1.6	3.7	4.0
	3H	1.3	2.9	1.7	3.2	3.6	1.2	2.8	1.5	3.1	3.4
	4H	1.3	2.6	1.7	3.0	3.3	1.1	2.5	1.5	2.8	3.1
	6H	1.3	2.3	1.7	2.6	3.0	1.1	2.1	1.5	2.5	2.8
	8H	1.2	2.3	1.6	2.6	3.0	1.1	2.1	1.5	2.4	2.8
	12H	1.2	2.2	1.6	2.6	3.0	1.0	2.1	1.4	2.4	2.8
4H	2H	1.1	2.5	1.5	2.8	3.1	1.3	2.6	1.7	3.0	3.3
	3H	1.3	2.3	1.7	2.7	3.1	1.3	2.3	1.7	2.7	3.1
	4H	1.2	2.3	1.6	2.7	3.1	1.2	2.3	1.6	2.7	3.1
	6H	0.9	2.6	1.3	3.0	3.5	0.9	2.6	1.4	3.1	3.5
	8H	0.7	2.7	1.2	3.1	3.6	0.8	2.7	1.3	3.1	3.6
	12H	0.6	2.6	1.1	3.1	3.6	0.7	2.6	1.2	3.1	3.6
8H	4H	0.8	2.7	1.3	3.1	3.6	0.7	2.7	1.2	3.1	3.6
	6H	0.7	2.5	1.2	3.0	3.5	0.7	2.5	1.2	2.9	3.5
	8H	0.7	2.2	1.2	2.7	3.3	0.7	2.2	1.2	2.7	3.3
	12H	0.8	1.8	1.4	2.3	2.8	0.8	1.8	1.4	2.3	2.8
12H	4H	0.7	2.6	1.2	3.1	3.6	0.6	2.6	1.1	3.1	3.6
	6H	0.7	2.2	1.2	2.7	3.3	0.6	2.2	1.2	2.7	3.3
	8H	0.8	1.8	1.4	2.3	2.8	0.8	1.8	1.4	2.3	2.8
Variations with the observer position at spacing:											
S =	1.0H	6.1 / -5.7					6.1 / -5.7				
	1.5H	8.9 / -6.6					8.9 / -6.6				
	2.0H	10.8 / -6.9					10.8 / -6.9				