

A.24 - Recessed Diffused Emission - Track - Direct Emission - 1176mm - 2700K




IP20    Dimmerable: 

DESIGN BY

Carlotta de Bevilacqua

DESCRIPTION

TECHNICAL DRAWINGS

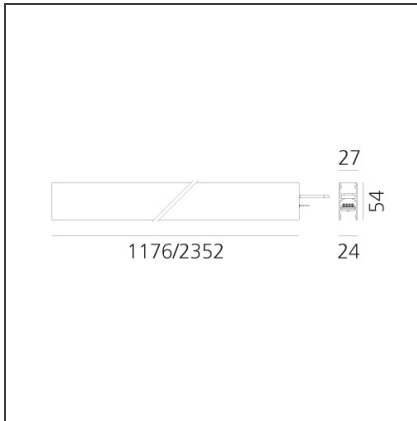

FEATURES

Article Code:	AQ27001	Series:	Indoor, 2018
Colour:	White	Emission:	Artemide Collection
Installation:	Recessed, Wall, Suspension, Ceiling		Direct
Environment:	Indoor		

DIMENSIONS

Length:	cm 117.6
Width:	cm 2.7
Weight:	kg 1.7
Recessed depth:	cm 5.4

INCLUDED SOURCES

Category:	LED	Color temperature (K):	2700K
Number:	1	Color Tolerance:	MacAdam 2SDCM
Watt:	33W	CRI:	80
Type:	0	Service Life:	L70 (6K) 50000h

LUMINAIRE

Watt:	33W	Delivered lumens output (lm):	2841lm
		CCT:	2700K
		CRI:	80

Notes

*Uses 1 DALI address. Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories. End caps have to be ordered separately. Opal diffusing screen has to be ordered separately. Depending on the driver, the product can be undimmable or dimmable DALI.

ACCESSORIES




A.24 - Recessed Accessories - Transition Joint - White
AQ29001




A.24 - Remote Box Power Supply Kit - 313x243x57,5h - (230VAC-48VDC 240W DALI)
AQ16000




240W Recessed power supply kit - 396x195x112H - 230VAC-48VDC IP20 - DALI
AQ16801



A.24 - Recessed Accessories - Insulating Spacer (1x)
AQ20601



A.24 - Recessed Accessories - End Cap (2x) - White
AQ25001




A.24 - Opal Diffusing Screen - 10m
AQ16200



150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - White
AQ17901




150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - Black
AQ17904



240W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")
AQ18000




150W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")
AQ18100




240W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - White
AQ17201




240W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - Black
AQ17204




A.24 - Opal Diffusing Screen - 25m
AQ16300
A.24 - Opal




A.24 - Opal Diffusing Screen - 50m
AQ16400
A.24 - Flexible



A.24 - Opal Diffusing Screen - 1176mm
AQ16500
240W Recessed




Diffusing Screen -
3528mm
AQ16700



Opal Diffusing
Screen - 10m
AQ90000




power supply kit -
396x195x112H -
230VAC-48VDC
IP20 -
Undimmable
AQ17801



A.24 - Flexible
Opal Diffusing
Screen - 25m
AQ90100



240W Ceiling
power supply kit -
351x61x111H -
230VAC-48VDC
IP20 -
Undimmable -
White
AQ17301



A.24 - Flexible
Opal Diffusing
Screen - 50m
AQ90200




240W Ceiling
power supply kit -
351x61x111H -
230VAC-48VDC
IP20 -
Undimmable -
Black
AQ17304



150W Ceiling
power supply kit -
321x91x111H -
230VAC-48VDC
IP20 - Dimmable
DALI - White
AQ17701



150W Ceiling
power supply kit -
321x91x111H -
230VAC-48VDC
IP20 - Dimmable
DALI - Black
AQ17704



DALI to DALI-Selv
Interface
103x67x21H
AQ18200