

# Picto 100 LED track horizontal - white 28° 4000K - Eutrac - Dimmable



IP20   Dimmerable: 


## DESIGN BY

Studio Artemide

## DESCRIPTION

This range of professional projectors is distinguished by design, excellent performance and flexibility. Picto is a complete and versatile range, suitable for use in retail spaces, showrooms, museums or art galleries. Available in 3 sizes, installation options, designs, colours, optics and a wide range of accessories.

## TECHNICAL DRAWINGS

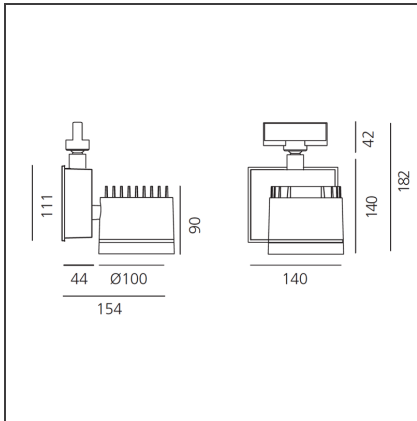

## FEATURES

|                      |                           |                       |                              |
|----------------------|---------------------------|-----------------------|------------------------------|
| <b>Article Code:</b> | AD16401                   | <b>Material:</b>      | aluminium                    |
| <b>Colour:</b>       | White                     | <b>Series:</b>        | Indoor                       |
| <b>Installation:</b> | Projector, Track, Ceiling | <b>Area contract:</b> | Hospitality, Retail, Culture |
| <b>Environment:</b>  | Indoor                    |                       |                              |

## DIMENSIONS

|                     |         |                        |     |
|---------------------|---------|------------------------|-----|
| <b>Length:</b>      | cm 15.4 | <b>Glow Wire Test:</b> | 850 |
| <b>Height:</b>      | cm 18.2 |                        |     |
| <b>Weight:</b>      | kg 2.6  |                        |     |
| <b>Inclination:</b> | -90+90  |                        |     |
| <b>Rotation:</b>    | cm 355  |                        |     |

## INCLUDED SOURCES

|                  |     |                               |                 |
|------------------|-----|-------------------------------|-----------------|
| <b>Category:</b> | LED | <b>Color temperature (K):</b> | 4000K           |
| <b>Number:</b>   | 1   | <b>Color Tolerance:</b>       | MacAdam 2SDCM   |
| <b>Watt:</b>     | 35W | <b>Service Life:</b>          | L70 (6K) 50000h |
| <b>Type:</b>     | 0   |                               |                 |
| <b>Class:</b>    | A   |                               |                 |

## LUMINAIRE

|                      |  |                                      |           |
|----------------------|--|--------------------------------------|-----------|
| <b>Power Supply:</b> | Power supply<br>220/240Vac 50/60Hz<br>included | <b>Delivered lumens output (lm):</b> | 2928lm    |
|                      |  | <b>CCT:</b>                          | 4000K     |
| <b>Watt:</b>         | 35W  | <b>Efficiency:</b>                   | 81%       |
|                      |  | <b>Efficacy:</b>                     | 83.66lm/W |
|                      |  | <b>CRI:</b>                          | 90        |
|                      |  | <b>Dimmable Typology:</b>            | Dali      |

**ACCESSORIES**

PICTO 100 -  
Accessory-holder  
+ Louvre (black).  
Black  
M081737



Accessory for  
ceiling installation  
(white)  
L176320



PICTO 100 -  
Accessory-holder  
+ wall washer  
screen (black).  
Black  
M082737



PICTO 100 -  
Accessory-holder  
(black) +  
Adjustable dowser  
(black)  
M082637



PICTO 100 - UV-  
Filter.  
M080545