


# Sharp - 44W 34° 4000K Trimless

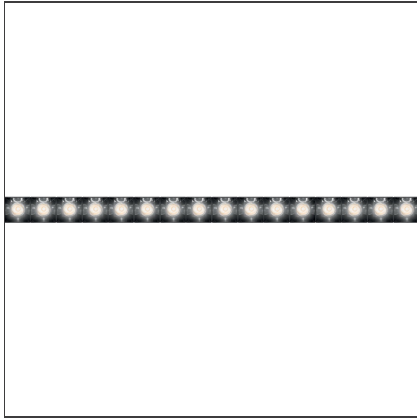

IP20  


## DESIGN BY

Carlotta de Bevilacqua

## DESCRIPTION

High-efficiency patented optical system that combines polynomial perspective to an element that shields geometrically the angle of vision of the beam. High uniformity of illumination and full emission control. Complete absence of possible light flaws as stains and multi-shadows. Recessed depth 60 mm. Suitable for a ceiling of 1 to 25 mm. Available in trim versions, trimless and SMD.

## TECHNICAL DRAWINGS

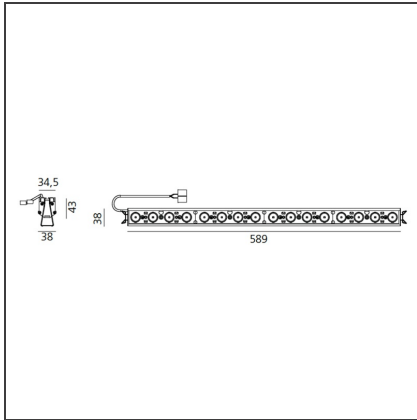

## FEATURES

<b>Article Code:</b>	AF75400	<b>Series:</b>	Indoor
<b>Colour:</b>	Black		
<b>Installation:</b>	Recessed, Ceiling		
<b>Environment:</b>	Indoor		

## DIMENSIONS

<b>Length:</b>	cm 58.9
<b>Width:</b>	cm 4.3
<b>Height:</b>	cm 3.8

## INCLUDED SOURCES

<b>Category:</b>	LED	<b>Color temperature (K):</b>	4000K
<b>Number:</b>	1		
<b>Watt:</b>	44W		
<b>Type:</b>	0		
<b>Class:</b>	A		

## LUMINAIRE

<b>Watt:</b>	44W	<b>Delivered lumens output (lm):</b>	3220lm
		<b>CCT:</b>	4000K
		<b>Efficiency:</b>	71%
		<b>Efficacy:</b>	73.19lm/W
		<b>CRI:</b>	90

**ACCESSORIES**



Screen 4x White  
AF95201



Screen 4x Black  
AF95204




Driver 50 W  
900mA  
DV1005



Driver 40 W  
900mA  
DV1006



Driver 55 W  
900mA  
DV1007



Recessed frame  
16x  
AF90500



Sharping wall grazer lens Kit (4pcs) - 26°x70° elliptical lenses kit. It has to be used on top of S 20° reflectors to get an elliptical beam (greter axis along the module lenght). It contains 4 lenses.  
AF06000