

**BEGA****23 619.1**

Ceiling luminaire for indoor use



Project · Reference number

Date

## Product data sheet

### Application

Surface mounted LED downlight · indoor luminaire with hand-blown opal glass and metal housing. A focusing / dispersing lens bundles the powerful LED-light in the centre of the reflector for a direct proportion of downlight. At the same time, a proportion of the dispersed light is used to illuminate the luminaire glass and to generate the vertical illuminance. Luminaires for rooms, stairways and corridors.

### Product description

Luminaire made of Aluminium, finish white enamel  
Opal glass with screw neck  
Additional focusing / diffusing lens made of partially frosted crystal glass  
Reflector made of pure, high-gloss anodized aluminium  
Silicone gasket  
2 mounting holes  $\varnothing$  4.5 mm  
Distance apart 69 mm  
1 cable entry for mains supply cable up to  $\varnothing$  10,5 mm max.  $3 \times 1,5^{\square}$   
Connecting terminals  $2.5^{\square}$   
Earth conductor connection  
LED power supply unit  
220-240 V  $\sim$  0/50-60 Hz  
DC 176-264 V  
Safety class I  
 – Safety mark  
**CE** – Conformity mark  
Weight: 0.7 kg

### Inrush current

Inrush current: 7 A / 112  $\mu$ s  
Maximum number of luminaires of this type per miniature circuit breaker:  
B 10A: 38 luminaires  
B 16A: 61 luminaires  
C 10A: 64 luminaires  
C 16A: 102 luminaires

### Lamp


Module connected wattage	3 W
Luminaire connected wattage	4.1 W
Rated temperature	$t_a = 25^{\circ}\text{C}$
Ambient temperature	$t_{a, \text{max}} = 50^{\circ}\text{C}$

### 23 619.1 K3

Module designation	LED-0349/930
Colour temperature	3000 K
Colour rendering index	CRI > 90
Module luminous flux	445 lm
Luminaire luminous flux	255 lm
Luminaire luminous efficiency	62,2 lm/W

### 23 619.1 K4

Module designation	LED-0349/940
Colour temperature	4000 K
Colour rendering index	CRI > 90
Module luminous flux	460 lm
Luminaire luminous flux	263 lm
Luminaire luminous efficiency	64,1 lm/W

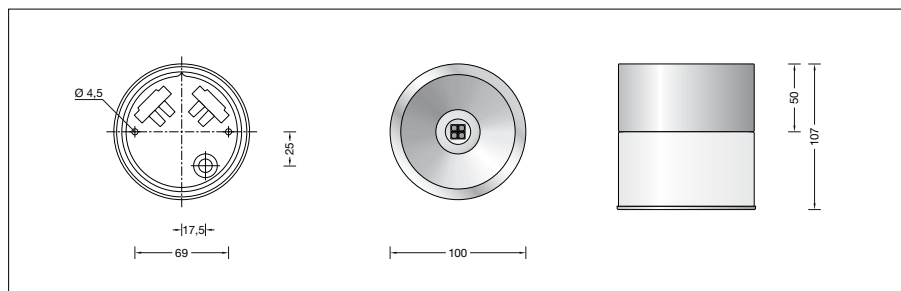

### Service life of the LED

Ambient temperature  $t_a = 25^{\circ}\text{C}$   
– at > 500,000 h: L70 B50  
max. ambient temperature  $t_a = 50^{\circ}\text{C}$   
– at 167,000 h: L70 B50

### Lighting technology

Half beam angle  $45^{\circ}$   
Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and interior lighting as well as luminaire data in EULUMDAT and IES format are available on our website [www.bega.com](http://www.bega.com).

### Article No. 23 619.1

LED colour temperature optionally 3000 K or 4000 K  
3000 K – Article number + **K3**  
4000 K – Article number + **K4**

### Optional finishes

- White enamel code number **.1**
- Stainless steel code number **.2**
- Polished aluminium code number **.3**