BEGA

Wall luminaire

Project · Reference number

Product data sheet

Application

Wall luminaire for many lighting tasks in or on buildings. Luminare distinguished by its high corrosion resistance.


Product description


Luminaire made of copper, brass and stainless steel Antique glass Wall mounting with a mounting plate made of stainless steel, Steel grade number 1.4301 Mounting plate with 2 fixing holes ø 5.5 mm · 70 mm spacing 1 cable entry for mains supply cable up to ø 10,5 mm max. $3 \times 1,5^{\Box}$ Connecting terminal 2.5 with plug connection Earth conductor connection Lampholder E 27 Safety class I Protection class IP 23 Protected against granular foreign bodies > 12 mm and showers up to 60° 🛣 10 🖄 – Safety mark **CE** – Conformity mark Weight: 3.7 kg

Copper

The luminaire parts made of solid copper are delivered with the metal's natural surface colour.

Time and weather factors create the natural patina characteristic for copper.

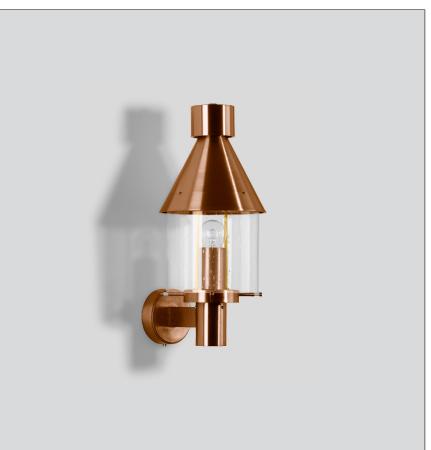

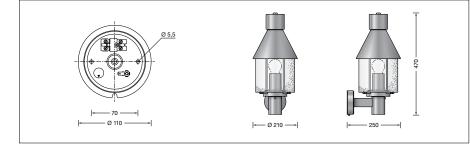

Lamp

Luminaire with lampholder E 27 Lamp wattage max. 100 W

High voltage tungsten halogen lamp QA 55 \cdot E 27

Osram: Hal Pro CL A 77 W	1320 lm
Philips: Halog. Classic 70 W A55 1CT	1200 lm
Sylvania: CLECO A55 230V 70W	1190 lm

Please note the lamp manufacturers' operating instructions.

31 441

10 🙆 IP 23

Date