

**BEGA****50 025**

Ceiling and wall luminaire for indoor use

Project · Reference number

Date

## Product data sheet

**Application**

Ceiling and wall luminaire · indoor luminaire made of hand-blown opal glass and metal housing, for all lighting tasks. They are ideal for places where a soft and uniform lighting distribution is required. Luminaire with HF-motion sensor and group module (Master).

**Product description**

Metal housing,  
finish white enamel  
Hand-blown opal glass, satin matt,  
with bayonet closure  
Integrated HF-motion sensor,  
maximum range 8 m  
Integrated group module,  
maximum range 30 m  
2 mounting holes  $\varnothing$  6 mm  
Distance apart 340 mm  
2 cable entries for through-wiring for mains  
cable up to  $\varnothing$  10,5 mm max.  $3 \times 1.5^{\square}$   
Connection terminal  $2.5^{\square}$   
Earth conductor connection  
LED power supply unit  
230 V  $\sim$  50 Hz  
Safety class I  
**CE** – Conformity mark  
Weight: 4.3 kg

**Inrush current**

Inrush current: 5 A / 50  $\mu$ s  
Maximum number of luminaires of this  
type per miniature circuit breaker:  
B 10A: 31 luminaires  
B 16A: 50 luminaires  
C 10A: 52 luminaires  
C 16A: 85 luminaires

**Lamp**

Module connected wattage 28.1 W  
Luminaire connected wattage 34.5 W  
Rated temperature  $t_a = 25^{\circ}\text{C}$   
Ambient temperature  $t_{a\text{max}} = 30^{\circ}\text{C}$

**50 025 K3**

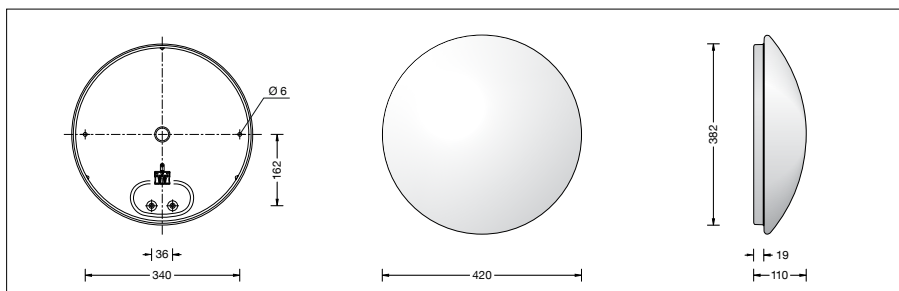
Colour temperature 3000 K  
Colour rendering index CRI > 90  
Module luminous flux 3685 lm  
Luminaire luminous flux 2031 lm  
Luminaire luminous efficiency 58,9 lm/W

**50 025 K2**

Colour temperature 2700 K  
Colour rendering index CRI > 90  
Module luminous flux 3655 lm  
Luminaire luminous flux 2014 lm  
Luminaire luminous efficiency 58,4 lm/W

**50 025 K4**

Colour temperature 4000 K  
Colour rendering index CRI > 90  
Module luminous flux 3820 lm  
Luminaire luminous flux 2104 lm  
Luminaire luminous efficiency 61 lm/W

**Service life of the LED**

Ambient temperature  $t_a = 25^{\circ}\text{C}$   
– at 275,000h: L70B50

max. ambient temperature  $t_a = 30^{\circ}\text{C}$   
– at 203,000h: L70B50

**Light technique**

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page [www.bega.com](http://www.bega.com).

**Article No. 50 025**

LED colour temperature optionally 2700 K, 3000 K or 4000 K  
2700 K – Article number + **K2**  
3000 K – Article number + **K3**  
4000 K – Article number + **K4**

If the article number is followed by a **P**, we can also supply these luminaires in impact-resistant synthetic material.

**Accessory · Trim rings**

For this luminaire metal trim rings in 3 enamel surfaces are optional available. Trim rings are accessories and must be ordered separately.

Item	Part. No
Finish enamel <b>white</b>	<b>13007</b>
Finish enamel <b>palladium</b>	<b>13008</b>
Finish enamel <b>glossy silver</b>	<b>13009</b>