

BEGA**50 578.1**

Recessed ceiling luminaire for indoor use



Project · Reference number


Date

Product data sheet

Application

LED recessed ceiling luminaire · indoor luminaire with symmetrical wide beam light distribution and a remote non-dimmable power supply unit. For installation in suspended ceilings of 5-30 mm in interior applications.

Product description

Recessed LED ceiling luminaire with a remote power supply unit
 Luminaire housing made of cast aluminium
 Ceiling frame ring,
 Enamel, velvet white
 Inside hue white enamel
 Fixing is achieved by using
 2 fastening springs
 Recessed opening \varnothing 120 mm
 Recessed depth required 80 mm
 Light-diffusing disc
 Power connecting cable max. $2 \times 1.5^{\square}$
 External LED power supply unit
 220-240 V \sim 0/50-60 Hz
 Safety class II 
CE – Conformity mark
 Weight: 0.41 kg

Light technique



Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Lamp

Module connected wattage	10 W
Luminaire connected wattage	11.8 W
Rated temperature	$t_a = 25^{\circ}\text{C}$
Ambient temperature	$t_{a\text{max}} = 40^{\circ}\text{C}$

50 578.1 K3

Module designation	LED-0859/930
Colour temperature	3000 K
Colour rendering index	CRI > 90
Module luminous flux	1355 lm
Luminaire luminous flux	872 lm
Luminaire luminous efficiency	73,9 lm/W

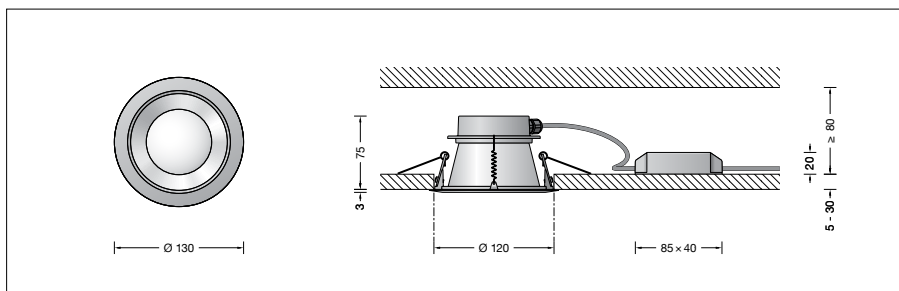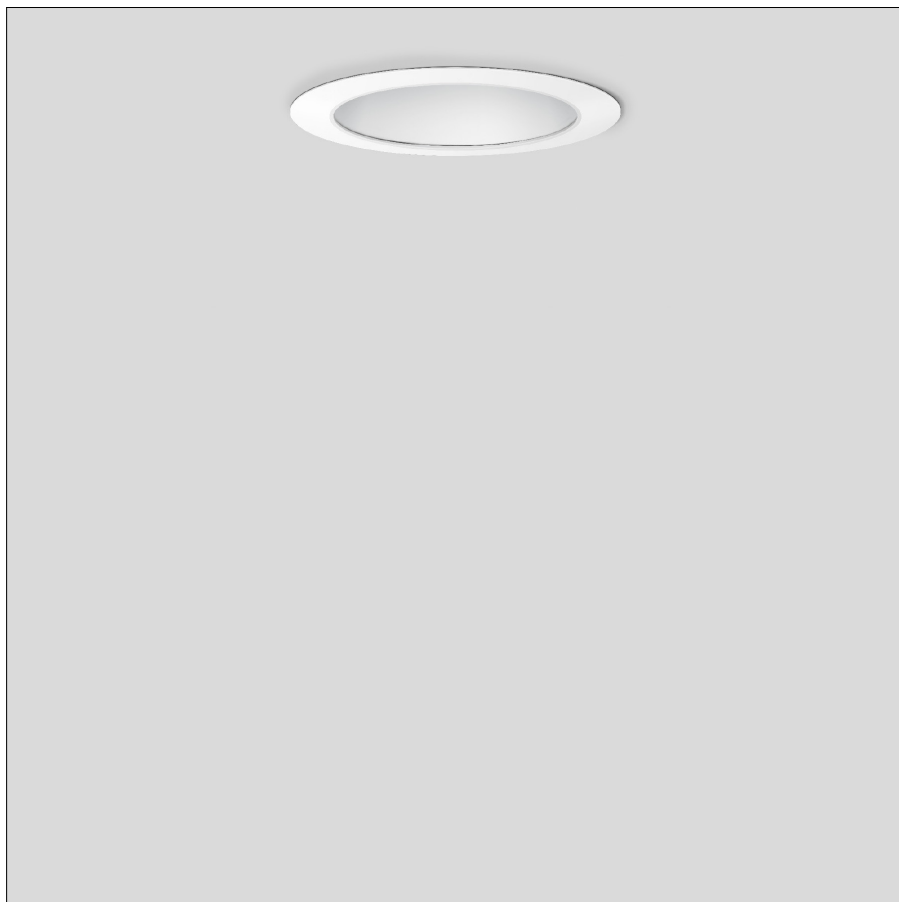

Service life · Ambient temperature

Ambient temperature $t_a = 25^{\circ}\text{C}$	
LED psu:	> 50,000h
LED module:	105,000h (L 80 B 50) 50,000h (L 90 B 50)

Ambient temperature $t_a = 40^{\circ}\text{C}$	
LED psu:	50,000h
LED module:	95,000h (L 80 B 50) 50,000h (L 80 B 50)

Article No. 50 578.1

Interior colour options

- white
- matt aluminium
- matt brass
- matt copper

Code number	.1
Code number	.2
Code number	.4
Code number	.6