

BEGA**56 601.2 P**

Pendant luminaire for indoor use



Project · Reference number

Date

Product data sheet

Application

Pendant luminaire · indoor luminaire for free-radiating and uniform light with white synthetic globe, white, metal luminaire housing and rod.

Product description

Luminaire housing, rod suspension and canopy made of metal, stainless steel finish

White synthetic globe

Diameter of rod 13 mm

Overall length of luminaire approx. 1950 mm

Connection terminal 2.5²

Earth conductor connection

LED power supply unit inside canopy

220-240 V \sim 0/50-60 Hz

DALI controllable

A basic isolation exists between power cable and control line

Safety class I

– Safety mark

CE – Conformity mark

Weight: 4.2 kg

Inrush current

Inrush current: 10 A / 200 μ s

Maximum number of luminaires of this type per miniature circuit breaker:

B10A: 18 luminaires

B16A: 30 luminaires

C10A: 31 luminaires

C16A: 51 luminaires

Lamp

Module connected wattage 35.1 W

Luminaire connected wattage 40 W

Rated temperature $t_a = 25$ °C

Ambient temperature $t_{a \max} = 45$ °C

56 601.2 P K3

Module designation LED-0523/930

Colour temperature 3000 K

Colour rendering index CRI > 90

Module luminous flux 4895 lm

Luminaire luminous flux 3853 lm

Luminaire luminous efficiency 96,3 lm/W

56 601.2 P K4

Module designation LED-0523/940


Colour temperature 4000 K

Colour rendering index CRI > 90

Module luminous flux 5105 lm

Luminaire luminous flux 4033 lm

Luminaire luminous efficiency 100,8 lm/W

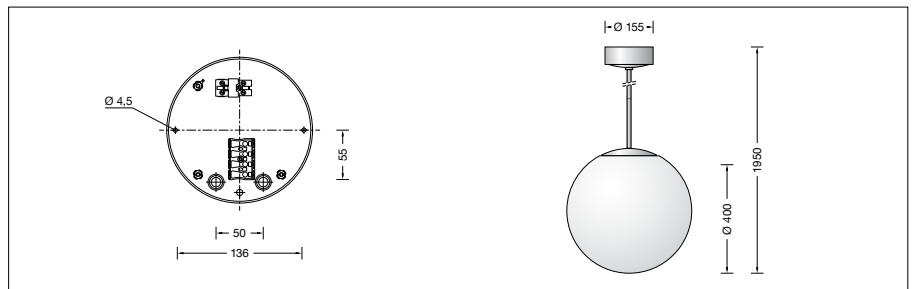

Service life of the LED

Ambient temperature $t_a = 25$ °C

– at 190,000h: L70B50

max. ambient temperature $t_a = 45$ °C

– at 120,000h: L70B50

Article No. 56 601.2 P

LED colour temperature optionally 3000 K or 4000 K

3000 K – Article number + **K3**

4000 K – Article number + **K4**

Optional finishes

- White enamel code number **.1**
- Stainless steel code number **.2**
- Chrome code number **.3**
- Brass code number **.4**