

GLASHÜTTE LIMBURG**Product data sheet****Pendant luminaire****56 623.3**

Project · Reference number

Date

Application

Pendant luminaire with hand-blown opal glass and metal housing.

A focusing / dispersing lens bundles the powerful LED-light in the centre of the reflector for a direct proportion of downlight. At the same time, a proportion of the dispersed light is used to illuminate the luminaire glass.

The used LED technique offers durability and optimal light output with low power consumption at the same time.

Product description

Metal luminaire housing,
finish polished aluminium

Hand-blown opal glass, with screw neck

Additional focusing / dispersing lens made of partially frosted crystal glass

Reflector made of pure, high-gloss anodized aluminium

Black flex suspension $5 \times 0,75$ □

with 1 steel messenger wire

Overall length of luminaire ~3000 mm

Connecting terminals 2.5□

Earth conductor connection

2-pole connecting terminal for digital control

LED power supply unit

220-240 V ~ 0/50-60 Hz

DALI controllable

A basic isolation exists between power cable and control line

Safety class I

CE – Conformity mark

Weight: 3.6 kg

Light technique

Half beam angle 34°

Luminaire data for the light planning program DIALux for indoor lighting as well as luminaire data in EULUMDAT and IES-format you will find on our website

www.glashuette-limburg.com.

Lamp

Module connected wattage 25.3 W

Luminaire connected wattage 30 W

Rated temperature $t_a = 25$ °C

Ambient temperature $t_{a \max} = 40$ °C

56 623.3

Module designation LED-0327/830

Colour temperature 3000 K

Colour rendering index $R_a > 80$

Module luminous flux 2950 lm

Luminaire luminous flux 1754 lm

Luminaire luminous efficiency 58,5 lm/W

56 623.3 K4

Module designation LED-0327/840


Colour temperature 4000 K

Colour rendering index $R_a > 80$


Module luminous flux 3170 lm

Luminaire luminous flux 1884 lm

Luminaire luminous efficiency 62,8 lm/W

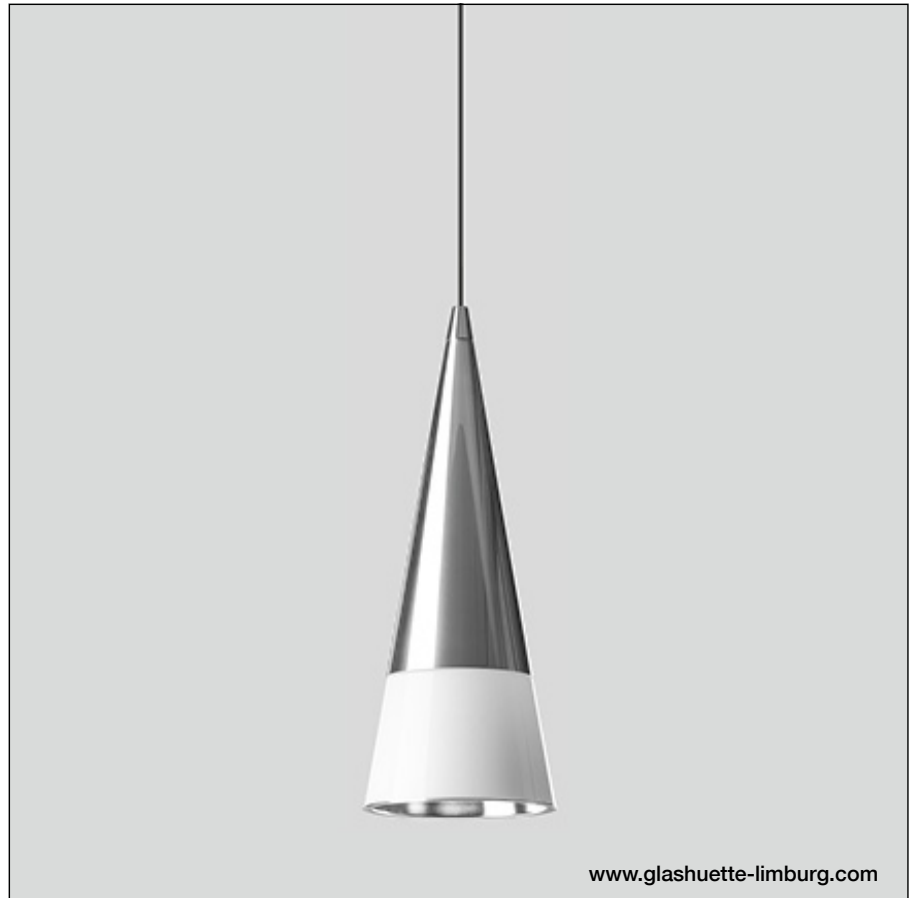

www.glashuette-limburg.com

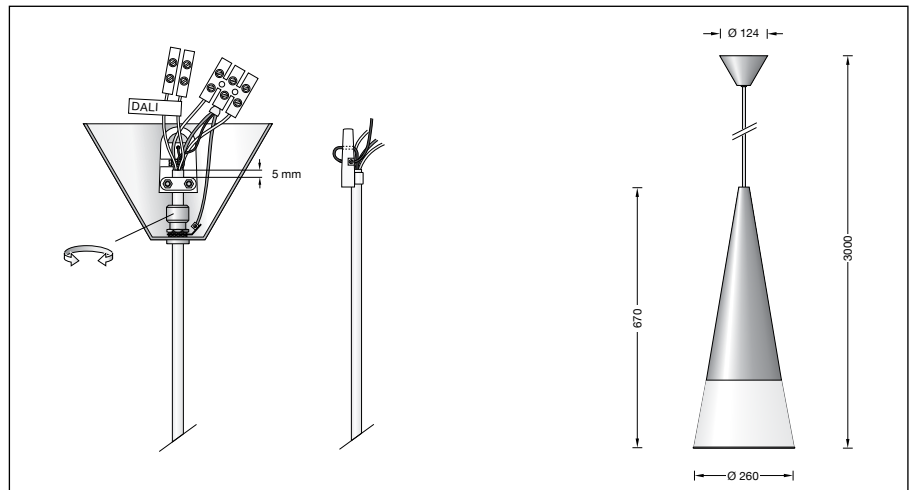**Lifetime of the LED**

Ambient temperature $t_a = 15$ °C

– at 50,000h: L90 B10

– at > 500,000h: L70 B50

Ambient temperature $t_a = 25$ °C

– at 50,000h: L90 B10

– at 390,000h: L70 B50

max. ambient temperature $t_a = 40$ °C

– at 50,000h: L90 B10

– at 250,000h: L70 B50

Article No. 56 623.3

Colour temperature 3000 K.

Also available with 4000 K on request.

3000 K – article number

4000 K – article number + **K4**

Finish options

• Enamel, white

• Stainless steel

• Polished aluminium

Code number **.1**

Code number **.2**

Code number **.3**