

BEGA**66 960**

Lichtbaustein®



Project · Reference number

Date

Product data sheet

Application

Lichtbaustein® Rectangle
Wall luminaire for corner mounting.
The luminaire is ideal for places where a soft
and uniform lighting distribution is required.
For interior and exterior applications.

Product description

Luminaire made of aluminium alloy
and stainless steel
BEGA Unidure® coating technology
Opal glass satin matt
1 fixing hole \varnothing 6.5 mm
1 cable entry for mains supply cable
up to \varnothing 10,5 mm max. $3 \times 1,5^{\square}$
Lampholder terminal 2.5^{\square}
Earth conductor connection
Lampholder E 27
Safety class I
Protection class IP 44
Protected against granular foreign bodies
> 1 mm and splash water
 – Safety mark
CE – Conformity mark
Weight: 1.4 kg

Lamp

Luminaire with lampholder E 27
Lamp output max. 100 W

For this luminaire we recommend the following
BEGA LED lamps:

13510 LED 7 W · 805 lm · 2700 K

13548 LED 7 W · 805 lm · 2700 K
dimnable

13584 LED 7 W · 805 lm · 3000 K

13586 LED 7 W · 805 lm · 3000 K
dimnable

13512 LED 8 W · 1055 lm · 2700 K

13564 LED 12 W · 1400 lm · 2700 K



13565 LED 12 W · 1400 lm · 2700 K
dimnable

13588 LED 8 W · 1055 lm · 3000 K

13590 LED 12 W · 1400 lm · 3000 K

13592 LED 12 W · 1400 lm · 3000 K
dimnable

Detailed technical and lighting data for the
lamps can be found in the data sheets on our
website.

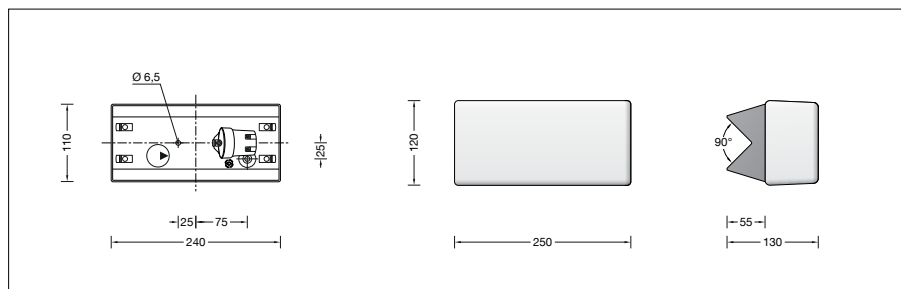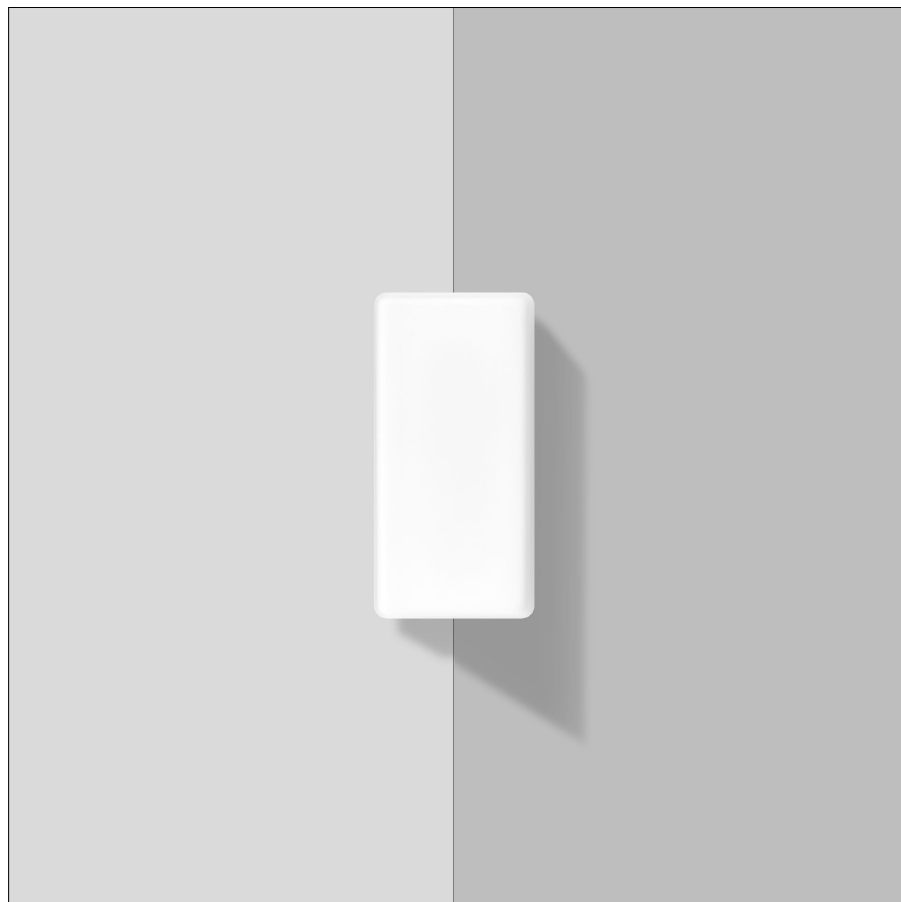

Light technique

Luminaire data for the light planning program
DIALux for outdoor lighting, street lighting and
indoor lighting as well as luminaire data in
EULUMDAT- and IES-format you will find on the
BEGA web page www.bega.com.

Light distribution

