




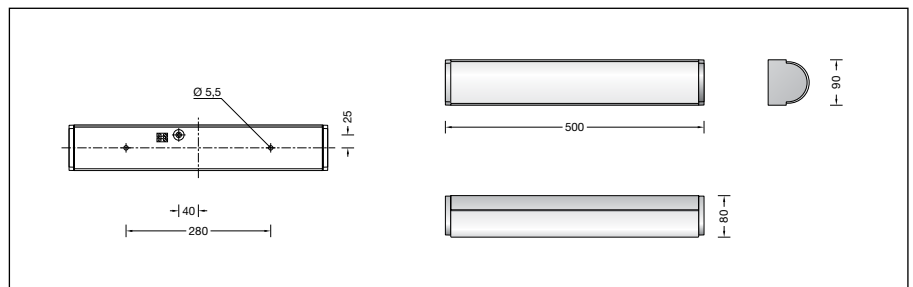
|                            |                       |  |                          |
|----------------------------|-----------------------|--|--------------------------|
| <b>Product data sheet</b>  | <b>Wall luminaire</b> | <b>IP 44</b>  | <b>GLASHÜTTE LIMBURG</b> |
| Project · Reference number |                       | Date   |                          |

**Application**

Wall luminaire made of hand-blown opal glass, satin matt and metal housing, for all lighting tasks in interior applications. They are ideal for places where a soft and uniform lighting distribution is required. Luminaire with a high protection class.

**Product description**

Die-cast aluminium and aluminium housing, finish chrome  
 Hand-blown opal glass, satin matt  
 2 fixing holes  $\varnothing$  5.5 mm  
 280,2 mm spacing  
 1 cable entry for mains supply cable up to  $\varnothing$  10.5 mm max.  $3 \times 1.5^{\square}$   
 Connecting terminal 2.5 $^{\square}$   
 Earth conductor connection  
 Lampholder E 14  
 Safety class I  
 Protection class IP 44  
 Protected against granular foreign bodies > 1 mm and splash water  
 – Safety mark  
 – Conformity mark  
 Weight: 1.8 kg

**Lamps**

Luminaire with lampholder E 14  
 Lamp wattage max.  $3 \times 40$  W

3 Halogen-energy-saving lamps  
 QC 35 · 28 W/clear · E 14  
 Osram: Halogen-Energy Saver  
 Order no.: 64542 B ES

**Article No. 78 147.3**

Finish options  
 • Enamel, white  
 • Chrome  
 • Gold

345 lm

Code number **.1**  
 Code number **.3**  
 Code number **.4**

Please note the lamp manufacturer's operating instructions.