

BEGA**84 046**

Pole top luminaire » Straßburg «



Project · Reference number

Date

Product data sheet

Application

LED pole top luminaire with antique glass.
For lighting paths and parks in private areas.
For mounting heights 3000 mm.

Product description

Luminaire made of aluminium alloy,
aluminium and stainless steel
Crystal bubble glass
For pole top \varnothing 76 mm
Slip fitter insert depth 100 mm
Connecting cable H05VV-F 3G 1[□]
Cable length 3,5 m
LED power supply unit
220-240 V \sim 0/50-60 Hz
DC 176-280 V
Safety class I
Protection class IP 65
Dust-tight and protection against water jets
Impact strength IK06
Protection against mechanical
impacts < 1 joule
 – Safety mark
CE – Conformity mark
Weight: 16.2 kg

Inrush current

Inrush current: 20 A / 80 μ s
Maximum number of luminaires of this
type per miniature circuit breaker:
B 10A: 35 luminaires
B 16A: 56 luminaires
C 10A: 58 luminaires
C 16A: 94 luminaires

Lamp

Module connected wattage	11.5 W
Luminaire connected wattage	13.6 W
Rated temperature	$t_a = 25$ °C
Ambient temperature	$t_{a,max} = 50$ °C


84 046 K3

Module designation	LED-0786/830
Colour temperature	3000 K
Colour rendering index	CRI > 80
Module luminous flux	2025 lm
Luminaire luminous flux	1004 lm
Luminaire luminous efficiency	73,8 lm/W

Service life of the LED

Ambient temperature $t_a = 25$ °C
– at 390,000h: L70 B50

max. ambient temperature $t_a = 50$ °C
– at 275,000h: L70 B50

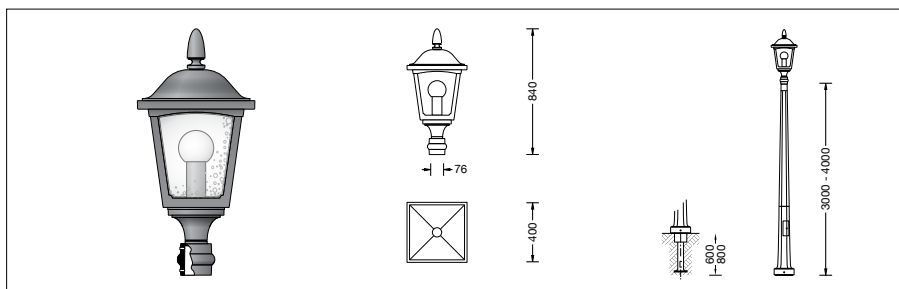

Light technique

Luminaire data for the light planning program
DIALux for outdoor lighting, street lighting and
indoor lighting as well as luminaire data in
EULUMDAT- and IES-format you will find on the
BEGA web page www.bega.com.

Accessories

For this luminaire we recommend the following
BEGA luminaire poles:

Tapered aluminium poles,
lacquered with access door and C-clamp
70 540 Pole with baseplate H 2500 mm
70 541 Pole with baseplate H 3000 mm

For suitable connection boxes please see the
instructions for use of the luminaire poles.

For the accessories a separate instructions
for use can be provided upon request.

Light distribution

