

BEGA**84 070**

Garden luminaire

IP 44

Project · Reference number

Date

Product data sheet

Application

Garden luminaire made of copper and crystal glass.
Luminaire for lighting gardens in private areas.
A luminaire distinguished by a high corrosion resistance.

Product description

Luminaire made of copper,
brass and stainless steel
Baseplate made of bronze alloy
Optical cylindrical lens made of crystal glass.
Luminaire with mounting plate for bolting onto a
foundation or an anchorage unit
Mounting plate with 3 fixing holes \varnothing 8.5 mm
Angle 120° · Pitch circle \varnothing 100 mm
Mounting bracket with connection box and
3-pole terminal 4[□] for connection of
mains supply cable max. $3 \times 2.5^\square$
Lampholder E 27
Safety class I
Protection class IP 44
Protected against granular foreign bodies
> 1 mm and splash water
CE – Conformity mark
Weight: 7.2 kg

Copper

The luminaire parts made of solid copper are
delivered with the metal's natural surface colour.
Time and weather factors create the natural
patina characteristic for copper.

Lamp

Luminaire with lampholder E 27
Lamp output max. 100 W

For this luminaire we recommend the following
BEGA LED lamps:


13510 LED 7 W · 805 lm · 2700 K
13548 LED 7 W · 805 lm · 2700 K
dimmmable

13584 LED 7 W · 805 lm · 3000 K
13586 LED 7 W · 805 lm · 3000 K
dimmmable

13512 LED 8 W · 1055 lm · 2700 K
13564 LED 12 W · 1400 lm · 2700 K
13565 LED 12 W · 1400 lm · 2700 K
dimmmable

13588 LED 8 W · 1055 lm · 3000 K
13590 LED 12 W · 1400 lm · 3000 K
13592 LED 12 W · 1400 lm · 3000 K
dimmmable

Detailed technical and lighting data for the
lamps can be found in the data sheets on our
website.

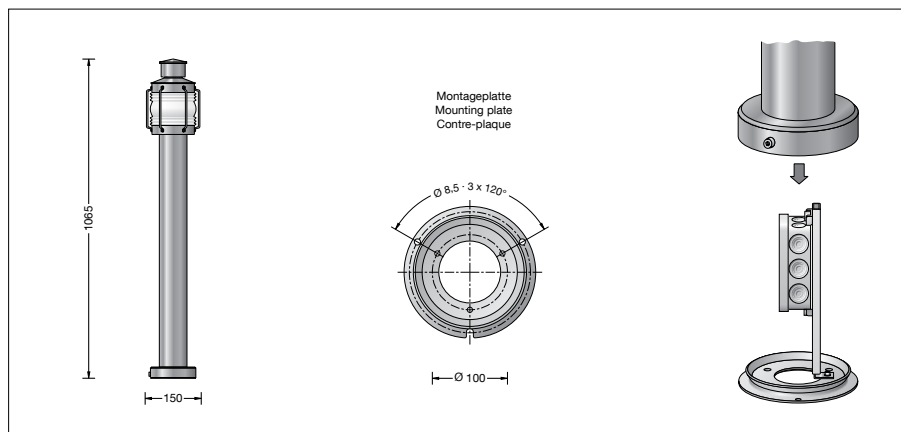

Accessory

70895 Anchorage unit
with mounting flange made of hot-dip
galvanised steel. Total length 400 mm.
3 stainless steel fixing screws M8.
Pitch circle \varnothing 100 mm.

See the separate instructions for use.